

**Flotide Pool Filter set**  
**PE/fibreglass-reinforced**  
**polyester 50 mm / 1 1/2"**  
**metric/imperial glue socket**  
**2,5bar 230VAC grey type**  
**FSF500-6W with RCD plug**  
**(0892597)**



**FLOTIDE**



# TECHNICAL SPECIFICATIONS

Colour	grey
Material	PE/fibreglass-reinforced polyester
Connection	metric/imperial glue socket
Voltage	230VAC
Frequency	50 Hz
Pressure	2,5 bar
Max. temp.	43 °C
Type	FSF500-6W
Size	50 mm / 1 1/2"
Diameter	535 mm
Weight	32.5 kg
Sand	85 kg
Max flow rate	12 m <sup>3</sup> /h
Pump	SC075
Max. pool vol.	60 m <sup>3</sup>

## DIMENSIONS

A 760 mm

B 856 mm

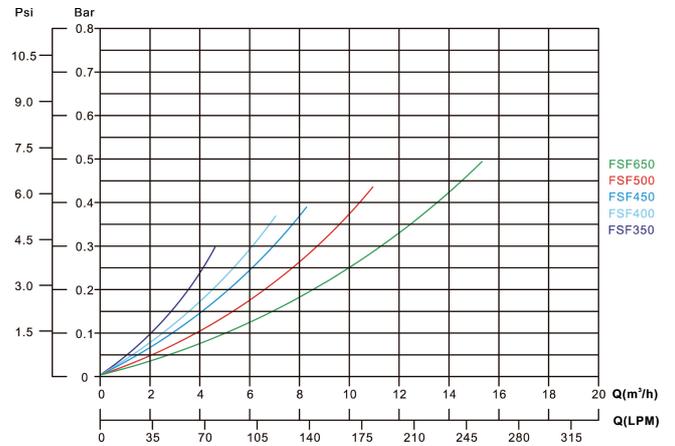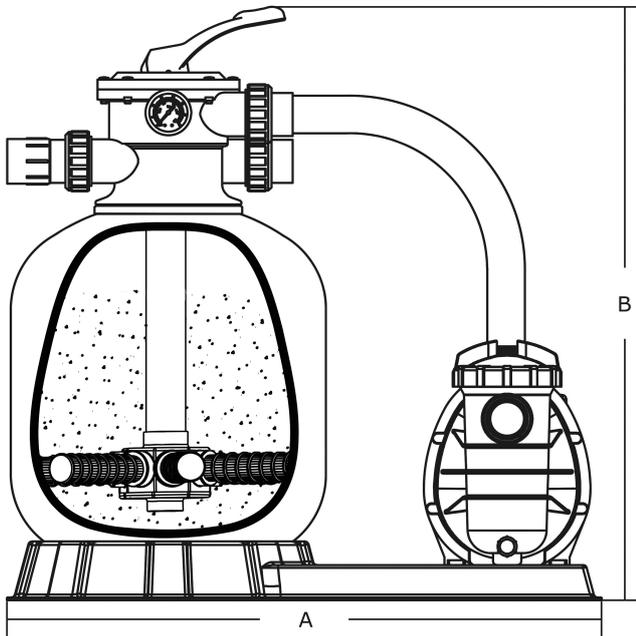

## PRODUCT INFORMATION

PE/fibreglass-reinforced polyester double layered tank with unequalled strength and durability. Equipped with top mount 6-way valve and centrifugal pump with pre-filter. Switch off the pump before each lever action.

Features:

- Designed for domestic pools
- Simple operation with 6-way multi-port valve
- Equipped with RCD differential plug (30mA)

**Last modified date: 05/11/2025**

Bosta UK Ltd.  
Reflection House

Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>