

**Flotide Filter set PE 32-38 mm x
50 mm / 1 1/2" hose tail 2bar
230VAC grey type FSU-8TP
with timer (7018814)**



TECHNICAL SPECIFICATIONS

Colour	grey
--------	------

Material	PE
----------	----

Connection	hose tail
------------	-----------

Voltage	230VAC
---------	--------

Diameter	330 mm
----------	--------

Frequency	50 Hz
-----------	-------

Pressure	2 bar
----------	-------

Max. temp.	40 °C
------------	-------

Type	FSU-8TP with timer
------	--------------------

Size	32-38 mm 50 mm / 1 1/2"
------	-------------------------

Weight	7 kg
--------	------

Sand	17 kg
------	-------

Max flow rate	8 m ³ /h
---------------	---------------------

Pump	AMU020TP
------	----------

Max. pool vol.	22 m ³
----------------	-------------------


DIMENSIONS

A 145 mm

B 460 mm

C 494 mm

D 450 mm

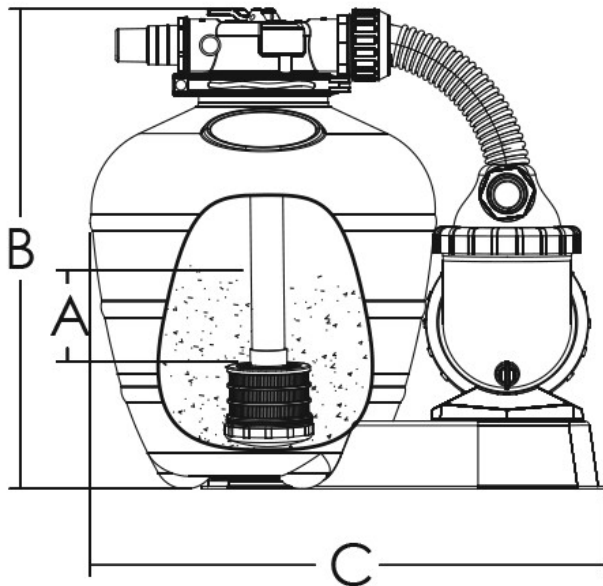

PRODUCT INFORMATION

Blow moulded PE filter tank with top mount 4-way valve and centrifugal pump.

Features:

- Ideal for above ground pools
- Pump with pre filter
- Simple operation with 4-way valve
- Equipped with RCD differential plug (30mA)
- Including pressure gauge

Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>