

# DAB Submersible pump fibre-reinforced plastic 1" female thread 1,9A 230VAC green type Feka 300 M-A with float switch (7038435)



# TECHNICAL SPECIFICATIONS

Colour	green
Material	fibre-reinforced plastic
Pump body	plastic
Material impeller 1	fibre-reinforced plastic
Connection	female thread
Voltage	230VAC
Max. temperature	35° °C
Minimum medium temperature	0 °C (continuous)
Press	1 "
Type	Feka 300 M-A
Output Power	0,3 HP
Max. head	6,4 m
Size	1"
Float	included
Power	0.22 kW
Ampere	1,9 A

Max flow rate

12 m<sup>3</sup>/h

## DIMENSIONS

Db

180 mm

H-1


71 mm

H-2

329 mm

ØDi-1

1 1/4 "

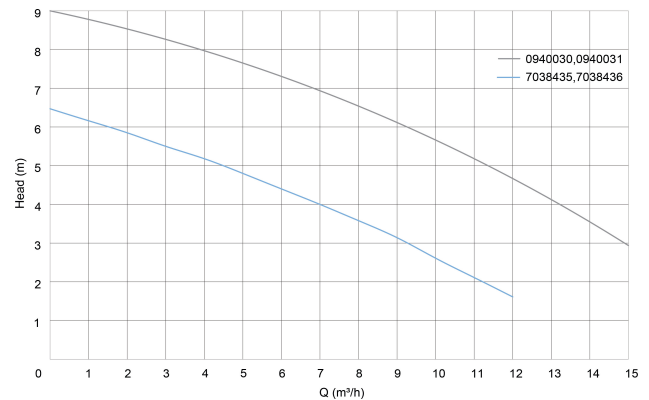

## PRODUCT INFORMATION

For solids up to 25mm.

Technical features:

Pump body, protection cover, filter and fan in noryl fibreglass.

Motor axis and motor body in S/S steel.

Seal with 3 seal rings in oil chamber.

Automatic float switch.

With built in thermal safety.

With approximately 10 metres cable.

**Last modified date: 12/06/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>