

**Profec Gate valve cast iron
GGG 50 epoxy coating DN100
DIN flange 16bar DN100 blue
PN10/16 type 302 (7038245)**




TECHNICAL SPECIFICATIONS

Colour	blue
Type	302
Material	cast iron GGG 50
Surface treatment	epoxy coating
Operation	handwheel
Colour lever	blue
Handle material	cast iron
Material valve	cast iron EPDM coated
Material spindle	stainless steel
Material housing	cast iron GGG 50
Material seal	NBR
Connection	DIN flange
Max. temperature	110 °C
RAL number	RAL5017
Flange according to DIN	DIN 2501/PN10
Pressure	16 bar
Max. temp.	120 °C

Size	DN100
Length	190 mm
Flange	PN10/16
Outer ø	218 mm
PCD	180 mm
Holes	8

DIMENSIONS

Construction length	din 3352/2c/f4
L	190 mm
L	190 mm
PCD	180 mm
Ct-1	271 mm
R	180 mm

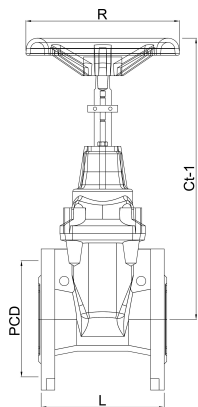

Last modified date: 09/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>