

**Foras Multi-stage centrifugal
pump stainless steel 304 1"
female thread 7bar 2,5A
230/400VAC blue type P 3S-
120/6 T (0920603)**



TECHNICAL SPECIFICATIONS

Colour	blue
--------	------

Material	stainless steel 304
----------	---------------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	stainless steel 304
---------------------	---------------------

Material seal	ceramic/graphite
---------------	------------------

Connection	female thread
------------	---------------

Max. temperature	110 °C
------------------	--------

Minimum medium temperature -15 °C
(continuous)

Max flow rate	4.8 m ³ /h
---------------	-----------------------

Press	1 "
-------	-----

Suction	1 "
---------	-----

BEP Capacity	3.2
--------------	-----

Efficiency	39 %
------------	------

Type	P 3S-120/6 T
------	--------------

Output Power	1,2 HP
--------------	--------

Max. head	66,6 m
-----------	--------

Size	1"
Seal	type L
Voltage	230/400VAC
Weight	12.5 kg
Power	0.9 kW
Impellers	6
Ampere	2,5 A
BEP Head	36

DIMENSIONS

Cb-1	128 mm
Cl-1	175 mm
G-1	140 mm
H-1	203 mm
H-2	192 mm
L	428 mm
Lb	190,8 mm
Lb-2	104,7 mm
W-1	164 mm

W-2



178 mm

ØDi-1

1 "

ØDi-2

1 "

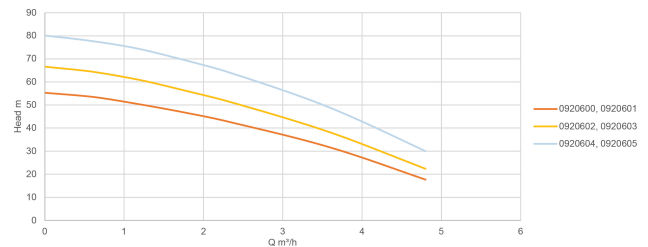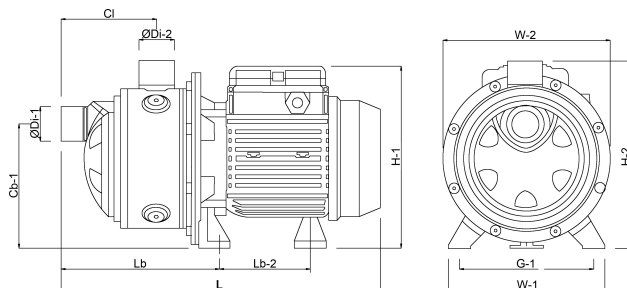

PRODUCT INFORMATION

Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids in the domestic, agricultural and industrial sectors; pressurising systems; irrigation; drinking and glycol water; water treatment; food industry; heating and air conditioning; washing system.

Maximum liquid temperature: from -15 up to 110 °C

Ambient temperature: max 40 °C.

Insulation class F; protection IP 44.

Supplied without cable.

Last modified date: 12/06/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>