

**Profec Swing check valve with
lifting device ductile iron
(GGG40) epoxy coating DN250
DIN flange 16bar DN250 blue
PN10 (0402641)**



TECHNICAL SPECIFICATIONS


Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	ductile iron
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
Temperature range	0°C - 80°C
Pressure	16 bar
Capacity	1077 m ³ /h
Size	DN250
Length	600 mm
DN	250
Flange	PN10
Outer ø	405 mm
PCD	350 mm

DIMENSIONS

L	600 mm
---	--------

PCD	350 mm
-----	--------

Ct-1	300 mm
------	--------

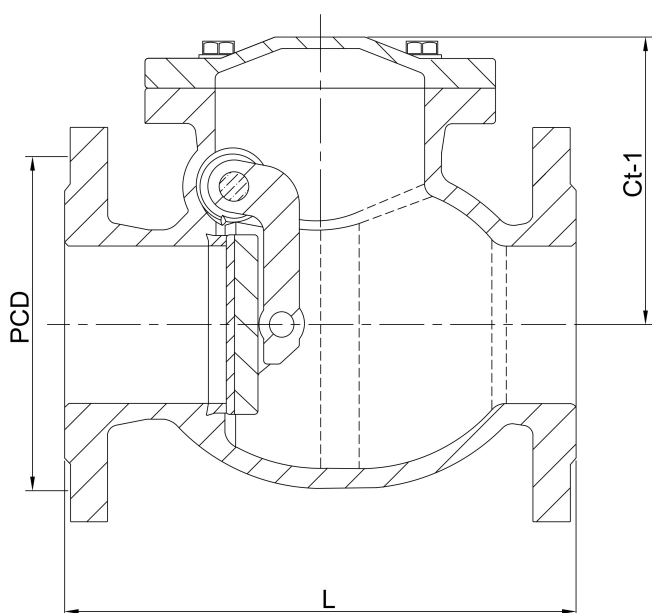

Last modified date: 04/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk

