Hydro-S Ball valve brass nickel plated 3" female thread 25bar (0470008)







TECHNICAL SPECIFICATIONS


Material brass nickel plated Surface treatment Operation lever Colour lever blue Handle material steel Housing construction 2-part hard chrome plated brass Ball material Shaft brass Material spindle brass Material housing brass Material seal **PTFE** Connection female thread Max. temperature 180°C Minimum medium temperature -20 °C (continuous) 25 bar Pressure Size 3"



Weight 345 kg

DIMENSIONS

Handle height	127
Lb	139 mm
ØDi-1	3 "
ØDi-2	3 "
F-1	24.4 mm
F-2	24.4 mm
Ct-1	131.6 mm
R	225 mm
ØDf	69 mm

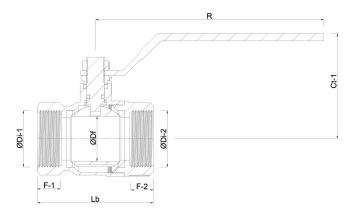



PRODUCT INFORMATION

The Hydro-S Ball valve is a cost efficient ball valve that is available with PTFE stem/ball seals. It is used by professionals for agricultural, heating and industrial projects. This reduced flow ball valve is made from brass which is known to be an environmental friendly solution as the recycling process of brass is less energy-intensive compared to aluminium and steel. It is available in a wide variety of sizes and with a 25 bar working pressure. Hydro-s is the brand of choice for professionals, looking for a cost efficient solution.

Last modified date: 04/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
http://www.bosta.com

