

Flotide Pool Filter set
PE/fibreglass-reinforced
polyester 50 mm / 1 1/2"
metric/imperial glue socket
2,5bar 230VAC grey type
FSF450-6W with RCD plug
(0897596)



FLOTIDE



bosta
bringing water to life



TECHNICAL SPECIFICATIONS

Colour	grey
Material	PE/fibreglass-reinforced polyester
Connection	metric/imperial glue socket
Voltage	230VAC
Frequency	50 Hz
Pressure	2,5 bar
Max. temp.	43 °C
Type	FSF450-6W
Size	50 mm / 1 1/2"
Diameter	455 mm
Weight	26.1 kg
Sand	45 kg
Max flow rate	8 m ³ /h
Pump	SS075
Max. pool vol.	40 m ³

DIMENSIONS

A 760 mm

B 813 mm

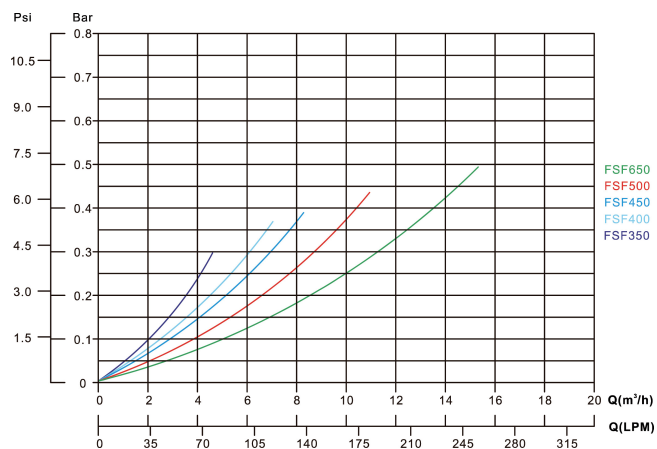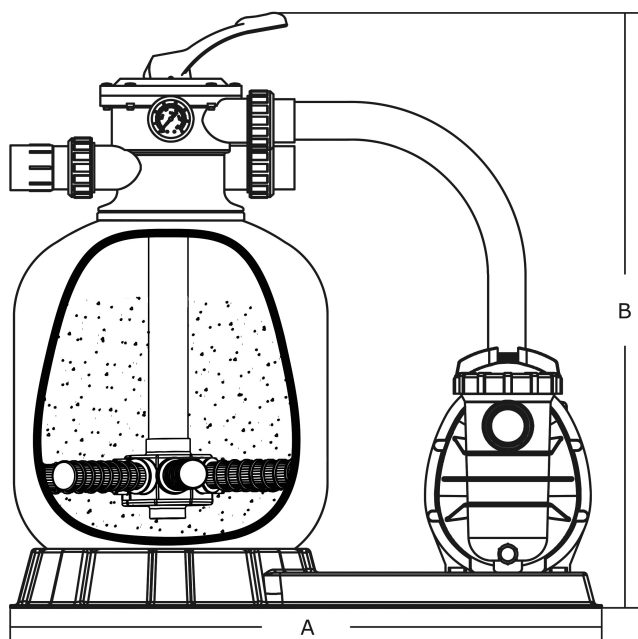

PRODUCT INFORMATION

PE/fibreglass-reinforced polyester double layered tank with unequalled strength and durability. Equipped with top mount 6-way valve and centrifugal pump with pre-filter. Switch off the pump before each lever action.

Features:

- Designed for domestic pools
- Simple operation with 6-way multi-port valve
- Equipped with RCD differential plug (30mA)

Last modified date: 05/11/2025

Bosta UK Ltd.
Reflection House

Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>