

**Grundfos Multi-stage  
centrifugal pump stainless  
steel 1 1/4" 2,5A 400VAC type  
CRI 5-6 A CA I V HQQV  
(7039732)**



**GRUNDFOS** 



# TECHNICAL SPECIFICATIONS

Material	stainless steel
Shaft	stainless steel 316
Pump body	stainless steel 316
Material impeller 1	stainless steel 304
Voltage	400VAC
Max. temperature	90 °C
Minimum medium temperature	-20 °C (continuous)
Temperature range	-20°C - 90°C
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Type	CRI 5-6 A CA I V HQQV
Output Power	1.5 HP
Size	1 1/4"
Power	1.1 kW
Impellers	6
MWC	40

Ampere	2,5 A
Max flow rate	8.5 m <sup>3</sup> /h
Suction	1 1/4 "
Efficiency	82,7 %
Motor RPM	2770

## DIMENSIONS

L	160 mm
H-1	622 mm
W-1	210 mm
ØDi-1	35 mm
ØDi-2	35 mm
Cb-1	50 mm
Cb-2	50 mm

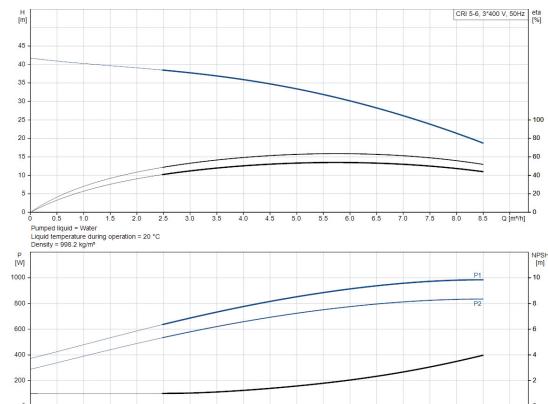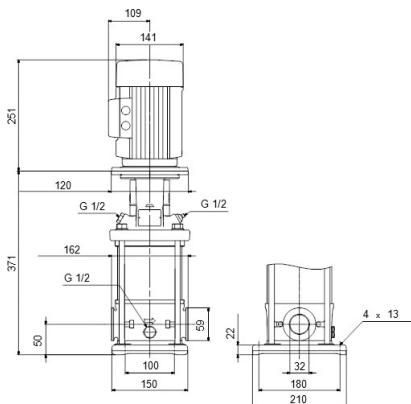

# PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

**Last modified date: 09/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>