

**Submersible pump plastic 1" x
1 1/4" male thread 2,4A
230VAC blue IPC 550 type IPC
Flat suction (7031123)**



TECHNICAL SPECIFICATIONS

Colour	blue
--------	------

Type	IPC
------	-----

Material	plastic
----------	---------

Output Power	0,73 HP
--------------	---------

Pump body	plastic
-----------	---------

Material impeller 1	noryl
---------------------	-------

Model	IPC 550
-------	---------

Connection	male thread
------------	-------------

Type	Flat suction
------	--------------

Float	not included
-------	--------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Power	0.55 kW
-------	---------

MWC	6
-----	---

Ampere	2,4 A
--------	-------

Max flow rate	6 m ³ /h
---------------	---------------------

Maximum ambient temperature	40 °C
-----------------------------	-------

Size	1" x 1 1/4"
------	-------------

BEP Capacity	3.6
--------------	-----


BEP Head	3.7
----------	-----

PORlh	4.6
-------	-----

PORhh	2.9
-------	-----

PORlq	2.52
-------	------

PORhq	4.32
-------	------

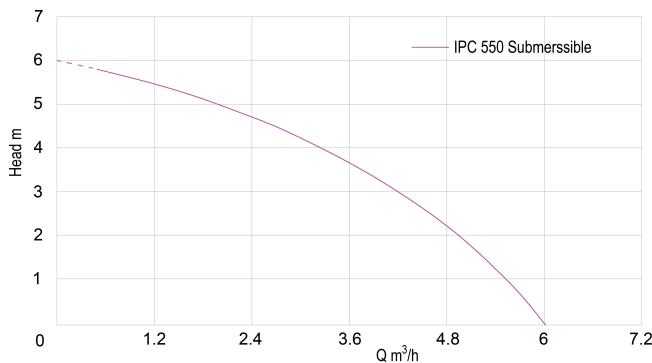

PRODUCT INFORMATION

For clean water only. Max. immersion depth: 7 metres. Built-in non return valve with 3 adaptors for different connections. Comes with a cooling jacket so they can be partially submerged. Pumping can start when the water level is above 5mm. After removing the suction filter, water can be pumped until 1mm. Installation: vertical, fixed or portable. Operation: selection (1) Automatic or (2) Manual operating mode. 10 mtr cable and DIN plug

Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>