

**Profec Ball valve PVC-U 90 mm
glue socket 10bar 24-
240VAC/VDC grey type Safe
600 with actuator J4C S55
(7018925)**



TECHNICAL SPECIFICATIONS

Colour	grey
Type	Safe 600 with actuator J4C S55
Material	PVC-U
Operation	actuator
Housing construction	3-part
Switching time	15 sec.
Material housing	PVC-U
Material seal	hytrel/EPDM
Connection	glue socket
Voltage	24-240VAC/VDC
Max. temperature	60 °C
Maximum ambient temperature -10 - +60 °C	
Pressure	10 bar
Size	90 mm
Factory pre-adjustment	 bar

DIMENSIONS


Lb	249 mm
----	--------

ØDi-1	90 mm
-------	-------

ØDi-2	90 mm
-------	-------

Ct-1	296 mm
------	--------

ØDf	80 mm
-----	-------

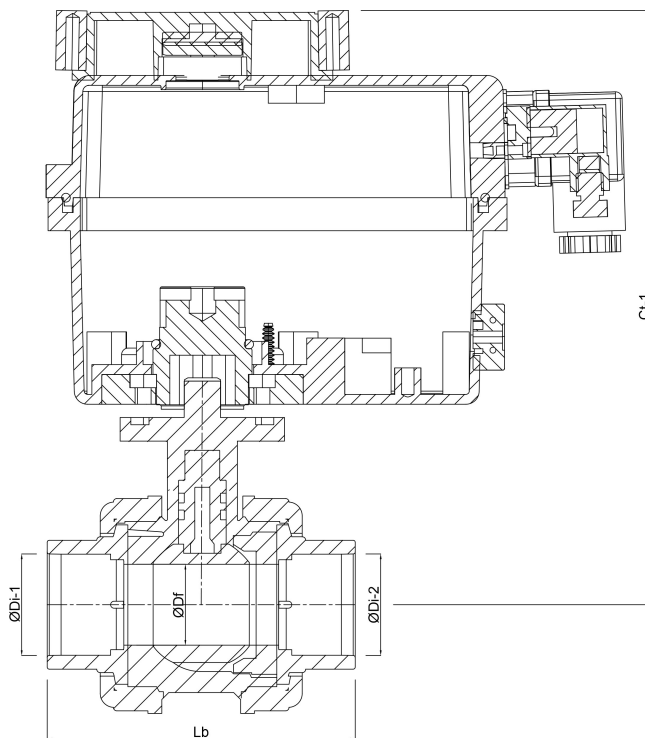

PRODUCT INFORMATION

Connection according to DIN 43650.

Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>