

**DAB Submersible pump
stainless steel 304 2" female
thread 8,63A 230VAC stainless
steel type Feka VS 1100 M-A
with float switch (7043788)**



TECHNICAL SPECIFICATIONS

Colour	stainless steel
--------	-----------------

Material	stainless steel 304
----------	---------------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	stainless steel 304
---------------------	---------------------

Connection	female thread
------------	---------------

Max. temperature	50 °C
------------------	-------

Minimum medium temperature 0 °C (continuous)	
---	--

Press	2 "
-------	-----

Maximum ambient temperature 40 °C	
-----------------------------------	--

Minimum ambient temperature 0 °C	
----------------------------------	--

Type	Feka VS 1100 M-A
------	------------------

Output Power	1,5 HP
--------------	--------

Max. head	14 m
-----------	------

Size	2"
------	----

Float	included
-------	----------

Voltage	230VAC
---------	--------

Power	1.1 kW
-------	--------

Ampere	8,63 A
--------	--------

Max flow rate	32 m ³ /h
---------------	----------------------

BEP Capacity	21.4
--------------	------

BEP Head	7.67
----------	------

PORlh	10.1
-------	------

PORhh	5.86
-------	------

PORlq	14.98
-------	-------

PORhq	25.68
-------	-------

DIMENSIONS

Cb-1	98 mm
------	-------



Db	170 mm
----	--------

H	172 mm
---	--------

L	492 mm
---	--------

W-1	203 mm
-----	--------

ØDi-1	2 "
-------	-----

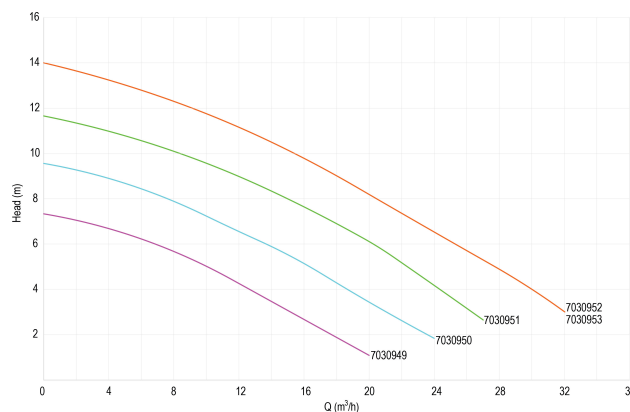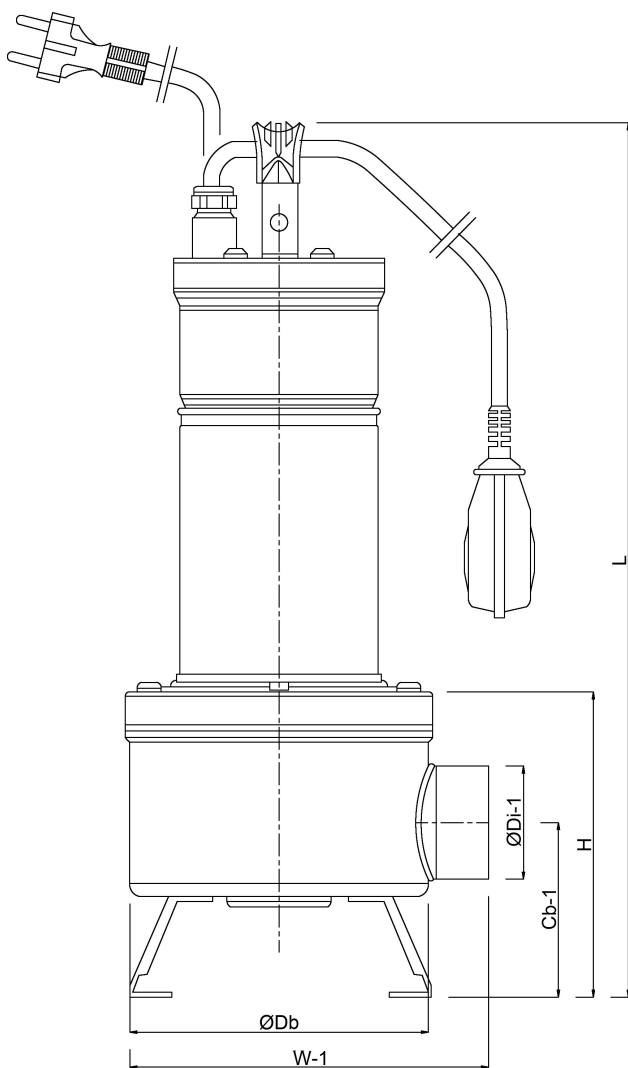

PRODUCT INFORMATION

Power cable: 10 metre H07RN-F, with plug for the single-phase version.

Installation: fixed or portable, vertical position.

Maximum immersion depth: 7 metre

Suitable for residential waste water as sewage containing solid matter with size up to 50 mm.

Last modified date: 05/09/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>