

**Profec Butterfly valve ductile  
iron (GGG40) epoxy coating  
DN50 flange 10bar DN50 blue  
PN6/10/16 type 601 disc  
stainless steel 316 (0401865)**



# TECHNICAL SPECIFICATIONS

Colour	blue
Type	601
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Operation	lever
Colour lever	black
Handle material	malleable cast iron
Material valve	stainless steel 304
Material spindle	stainless steel 316
Seat material	EPDM
Material housing	ductile iron (GGG40)
Material seal	EPDM
Connection	flange
DIN Standard	DIN 2501
Flange	PN6/10/16
Temperature range	0°C - 90°C
Pressure	10 bar

Size DN50

DN 50

Width 43 mm

Height 275 mm

Torque 10 Nm

## DIMENSIONS

Construction length din 3202 k1, iso 5752


W-1 43 mm

PCD 110/125 mm

Ct-1 190 mm

R 260 mm

W-2 86 mm

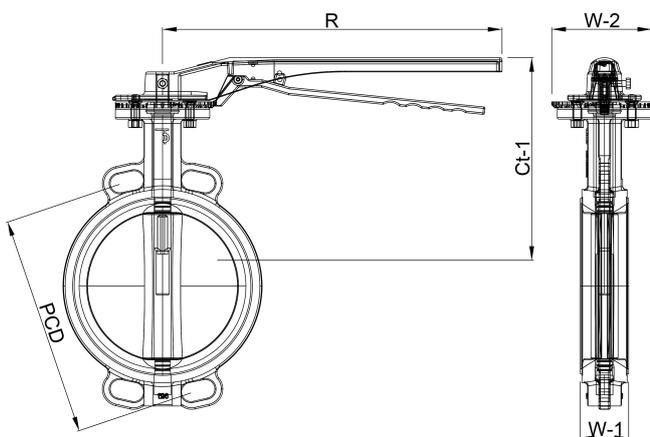

**Last modified date: 04/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>