

**DAB Multi-stage centrifugal
pump stainless steel 304 1"
female thread 8bar 6,3A
230VAC green self priming
type EUROINOX 50/50M
(7030922)**



TECHNICAL SPECIFICATIONS

| | |
|---|---------------------|
| Colour | green |
| Material | stainless steel 304 |
| Material impeller 1 | technopolymer |
| Model | self priming |
| Connection | female thread |
| Voltage | 230VAC |
| Max. temperature | 35 °C |
| Width | 174 mm |
| Minimum medium temperature 0 °C (continuous) | |
| Height | 203 mm |
| Press | 1 " |
| Maximum ambient temperature | 40 °C |
| Suction | 1 " |
| Minimum ambient temperature | 0 °C |
| Type | EUROINOX 50/50M |
| Output Power | 1,36 HP |

| | |
|----------------------------|-----------------------|
| MWC | 72 m |
| Size | 1" |
| Length | 384 mm |
| Weight | 15.5 kg |
| Power | 1 kW |
| Max flow rate | 4.8 m ³ /h |
| BEP Capacity | 3.61 |
| BEP Head | 44.3 |
| Packaging dimensions L/W/H | 480 x 212 x 265 mm |

DIMENSIONS



| | |
|------|--------|
| Cb-1 | 143 mm |
| Cl-1 | 166 mm |
| G-1 | 111 mm |
| H-1 | 203 mm |
| L | 384 mm |
| Mr | 241 mm |
| O | 9 mm |
| W-1 | 174 mm |

ØDi-1

1 "

ØDi-2

1 "

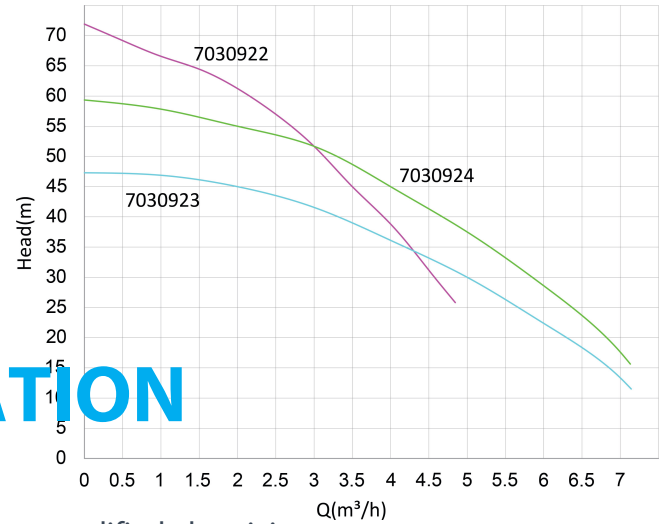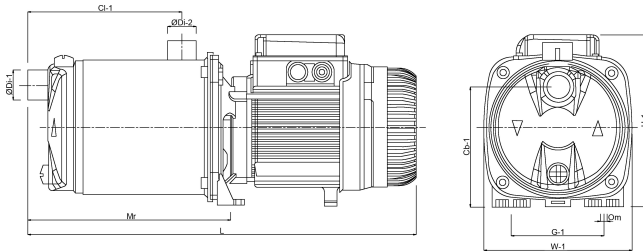

PRODUCT INFORMATION

Installation: fixed or portable in a horizontal position.

Supplied without cable, installation should be done by a qualified electrician.

Last modified date: 08/05/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>