


**Itap Ball valve brass nickel  
plated 1/4" female thread 5bar  
DN10 DVGW type 068  
(0401150)**

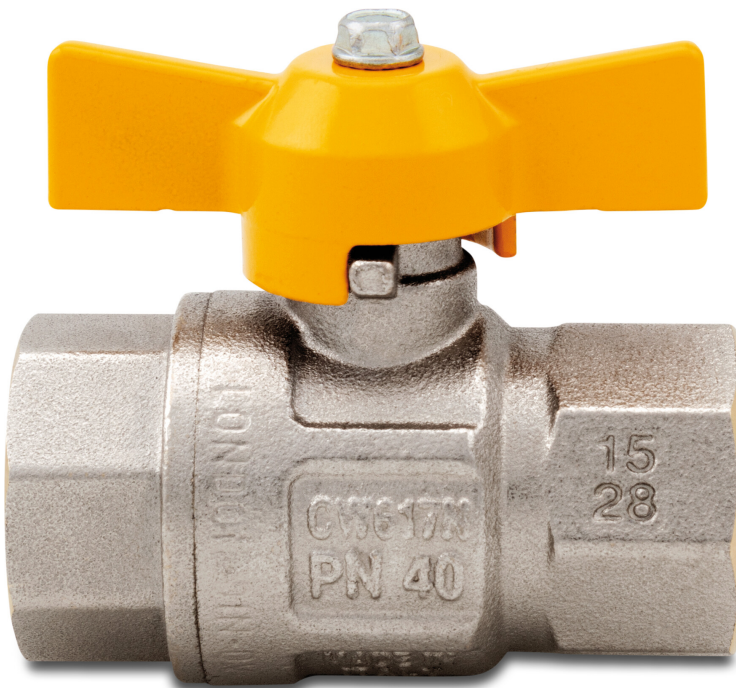

# TECHNICAL SPECIFICATIONS

|      |     |
|------|-----|
| Type | 068 |
|------|-----|

|          |       |
|----------|-------|
| Material | brass |
|----------|-------|

|                   |               |
|-------------------|---------------|
| Surface treatment | nickel plated |
|-------------------|---------------|

|          |      |
|----------|------|
| Approval | DVGW |
|----------|------|

|           |                  |
|-----------|------------------|
| Operation | butterfly handle |
|-----------|------------------|

|              |        |
|--------------|--------|
| Colour lever | yellow |
|--------------|--------|

|                 |           |
|-----------------|-----------|
| Handle material | aluminium |
|-----------------|-----------|

|                      |        |
|----------------------|--------|
| Housing construction | 2-part |
|----------------------|--------|

|               |                          |
|---------------|--------------------------|
| Ball material | hard chrome plated brass |
|---------------|--------------------------|

|                  |       |
|------------------|-------|
| Material housing | brass |
|------------------|-------|

|               |      |
|---------------|------|
| Material seal | PTFE |
|---------------|------|

|            |               |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

|                  |       |
|------------------|-------|
| Max. temperature | 60 °C |
|------------------|-------|

Minimum medium temperature -10 °C  
(continuous)

|      |      |
|------|------|
| Flow | full |
|------|------|

|          |       |
|----------|-------|
| Pressure | 5 bar |
|----------|-------|

|      |      |
|------|------|
| Size | 1/4" |
|------|------|

|    |    |
|----|----|
| DN | 10 |
|----|----|

## DIMENSIONS

|    |         |
|----|---------|
| Lb | 49,5 mm |
|----|---------|

|       |       |
|-------|-------|
| ØDi-1 | 1/4 " |
|-------|-------|

|       |       |
|-------|-------|
| ØDi-2 | 1/4 " |
|-------|-------|


|     |       |
|-----|-------|
| F-1 | 11 mm |
|-----|-------|

|     |       |
|-----|-------|
| F-2 | 11 mm |
|-----|-------|

|      |         |
|------|---------|
| Ct-1 | 37.3 mm |
|------|---------|

|   |         |
|---|---------|
| R | 23.5 mm |
|---|---------|

|     |       |
|-----|-------|
| ØDf | 10 mm |
|-----|-------|

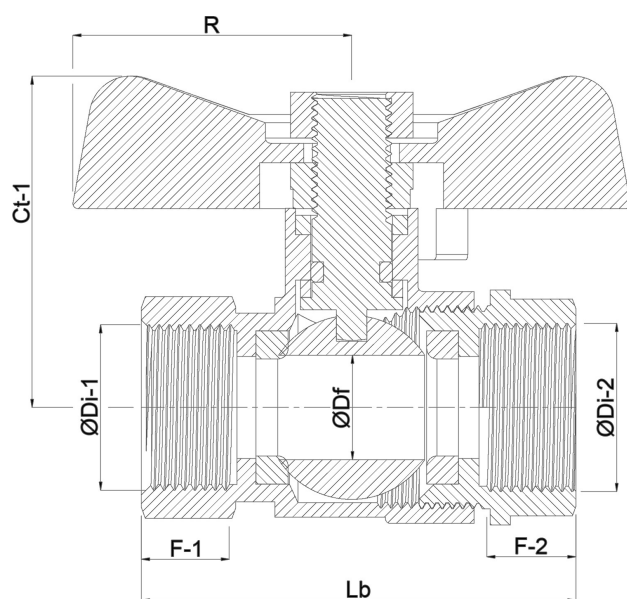

**Last modified date: 04/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>