

**Profec Swing check valve with
lifting device ductile iron
(GGG40) epoxy coating DN50
DIN flange 16bar DN50 blue
PN10/16 (0402634)**



TECHNICAL SPECIFICATIONS


Colour	blue
Material	ductile iron (GGG40)
Surface treatment	epoxy coating
Material cover	ductile iron
Material housing	ductile iron (GGG40)
Material seal	NBR
Connection	DIN flange
Gasket	NBR
Temperature range	0°C - 80°C
Pressure	16 bar
Capacity	41 m ³ /h
Size	DN50
Length	200 mm
DN	50
Flange	PN10/16
Outer ø	165 mm
PCD	125 mm

DIMENSIONS

L	200 mm
---	--------

PCD	125 mm
-----	--------

Ct-1	82.5 mm
------	---------

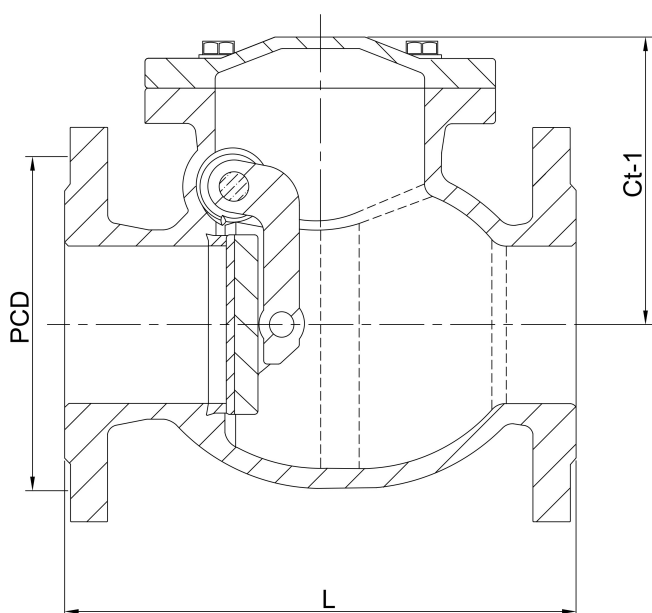

Last modified date: 04/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk

