

**Profec Gate valve cast iron GG
25 varnished DN80 DIN flange
10bar DN80 black PN10/16
type 200 (0400763)**



TECHNICAL SPECIFICATIONS

Colour	black
Type	200
Material	cast iron GG 25
Surface treatment	varnished
Operation	handwheel
Colour lever	black
Handle material	cast iron
Material valve	cast iron
Material spindle	stainless steel
Seat material	brass
Material housing	cast iron GG 25
Material seal	brass
Connection	DIN flange
Max. temperature	100 °C
Flange according to DIN	DIN 2501/PN10
Pressure	10 bar
Size	DN80

Length	180 mm
--------	--------

Flange	PN10/16
--------	---------

Outer ø	200 mm
---------	--------

PCD	160 mm
-----	--------

Holes	4
-------	---

DIMENSIONS

Construction length	din 3352/2c/f4
---------------------	----------------


L	180 mm
---	--------

L	180 mm
---	--------

PCD	160 mm
-----	--------

Ct-1	310 mm
------	--------

R	160 mm
---	--------

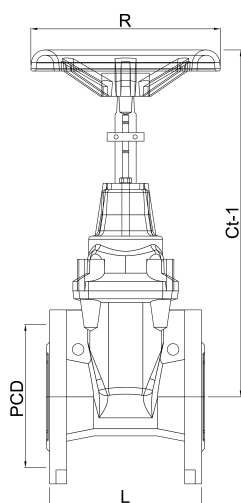

Last modified date: 04/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>