

# Hydro-S Ball valve brass nickel plated 1 1/4" female thread 25bar (0470004)



# TECHNICAL SPECIFICATIONS

Material	brass
Surface treatment	nickel plated
Operation	lever
Colour lever	blue
Handle material	steel
Housing construction	2-part
Ball material	hard chrome plated brass
Shaft	brass
Material spindle	brass
Material housing	brass
Material seal	PTFE
Connection	female thread
Max. temperature	180 °C
Minimum medium temperature -20 °C (continuous)	
Pressure	25 bar
Size	1 1/4"

Weight 52 kg

## DIMENSIONS

Handle height 635

Lb 70 mm

ØDi-1 1 1/4 "

ØDi-2 1 1/4 "


F-1 14.5 mm

F-2 14.5 mm

Ct-1 64.2 mm

R 118 mm

ØDf 27 mm

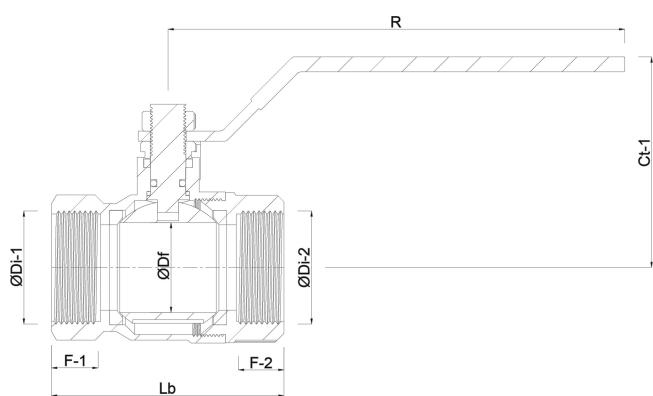

# PRODUCT INFORMATION

The Hydro-S Ball valve is a cost efficient ball valve that is available with PTFE stem/ball seals. It is used by professionals for agricultural, heating and industrial projects. This reduced flow ball valve is made from brass which is known to be an environmental friendly solution as the recycling process of brass is less energy-intensive compared to aluminium and steel. It is available in a wide variety of sizes and with a 25 bar working pressure. Hydro-s is the brand of choice for professionals, looking for a cost efficient solution.

**Last modified date: 04/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>