

**Grundfos Multi-stage
centrifugal pump stainless
steel 1 1/4" 1A 400VAC type
CRI 1-4 A CA I V HQQV
(7039653)**



GRUNDFOS 

TECHNICAL SPECIFICATIONS

Material	stainless steel
Shaft	stainless steel 316
Pump body	stainless steel 316
Material impeller 1	stainless steel 304
Voltage	400VAC
Max. temperature	90 °C
Minimum medium temperature	-20 °C (continuous)
Temperature range	-20°C - 90°C
Maximum ambient temperature	40 °C
Minimum ambient temperature	0 °C
Type	CRI 1-4 A CA I V HQQV
Output Power	0.5 HP
Size	1 1/4"
Power	0.37 kW
Impellers	4
MWC	25

Ampere

1 A

Max flow rate

2.4 m³/h

Suction

1 1/4 "

Efficiency

73,8 %

Motor RPM

2770

DIMENSIONS

L

162 mm

H-1

466 mm

W-1

210 mm

ØDi-1

35 mm

ØDi-2



35 mm

Cb-1

50 mm

Cb-2

50 mm

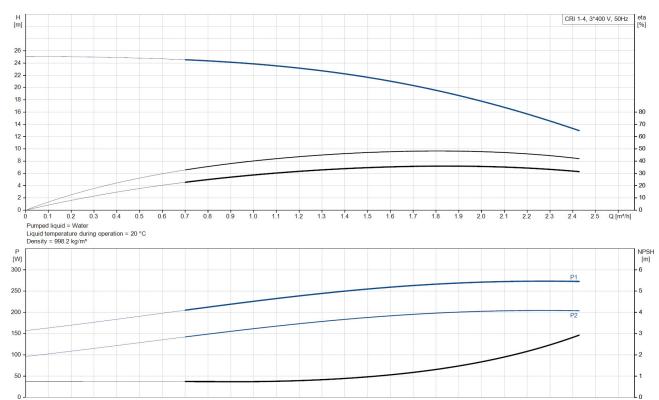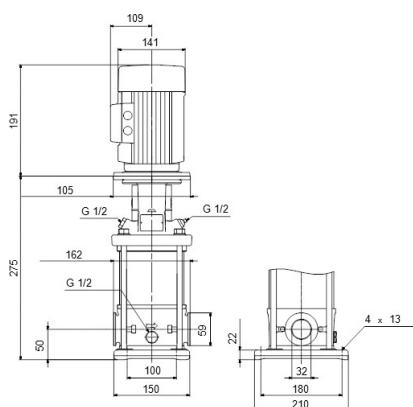

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 09/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>