

**Foras Multi-stage centrifugal
pump stainless steel 304 1"
female thread 7bar 2,7A
230/400VAC blue type P 3S-
150/7 T (0920605)**



TECHNICAL SPECIFICATIONS

Colour	blue
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	stainless steel 304
Material seal	ceramic/graphite
Connection	female thread
Max. temperature	110 °C
Minimum medium temperature (continuous)	-15 °C
Max flow rate	4.8 m ³ /h
Press	1 "
Suction	1 "
BEP Capacity	3.2
Efficiency	39 %
Type	P 3S-150/7 T
Output Power	1,5 HP
Size	1"

Seal	type M
------	--------

Voltage	230/400VAC
---------	------------

Weight	15.5 kg
--------	---------

Power	1.1 kW
-------	--------

Impellers	7
-----------	---

MWC	80,1
-----	------

Ampere	2,7 A
--------	-------

BEP Head	47
----------	----

DIMENSIONS

W-1	164 mm
-----	--------

ØDi-1	1 "
-------	-----

ØDi-2	1 "
-------	-----

G-1	140 mm
-----	--------

L	514 mm
---	--------

H-1	211 mm
-----	--------

Lb	214,8 mm
----	----------



Cb-1	134 mm
------	--------

Lb-2	128,2 mm
------	----------

Cl-1 199 mm

W-2 201 mm

H-2 198 mm

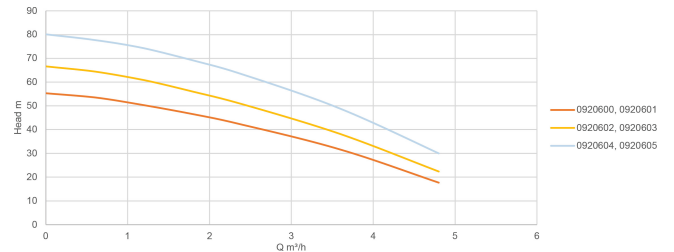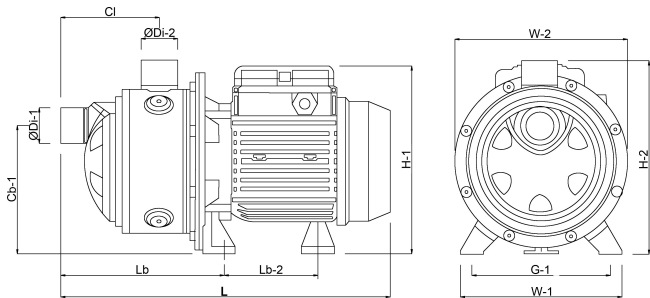

PRODUCT INFORMATION

Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids in the domestic, agricultural and industrial sectors; pressurising systems; irrigation; drinking and glycol water; water treatment; food industry; heating and air conditioning; washing system.

Maximum liquid temperature: from -15 up to 110 °C

Ambient temperature: max 40 °C.

Insulation class F; protection IP 44.

Supplied without cable.

Last modified date: 12/02/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>