

Pentair Sand filter fibreglass reinforced polyester 1 1/2" female thread 3,5bar blue type Triton® F-24T6-NEO-CP (7021208)



TECHNICAL SPECIFICATIONS

Colour	blue
Material	fibreglass reinforced polyester
Connection	female thread
Pressure	3,5 bar
Max. temp.	50 °C
Type	Triton® F-24T6-NEO-CP
Capacity	14 m ³ /h
Gravel	50 kg
Size	1 1/2"
Diameter	610 mm
Weight	16.3 kg
Sand	100 kg
Filter area	0.29 m ²
Max flow rate	14 m ³ /h
Max. pool vol.	70 m ³

DIMENSIONS


B	24 " inch
---	-----------

A	1009 mm
---	---------

B	610 mm
---	--------

C	904 mm
---	--------

D	847 mm
---	--------

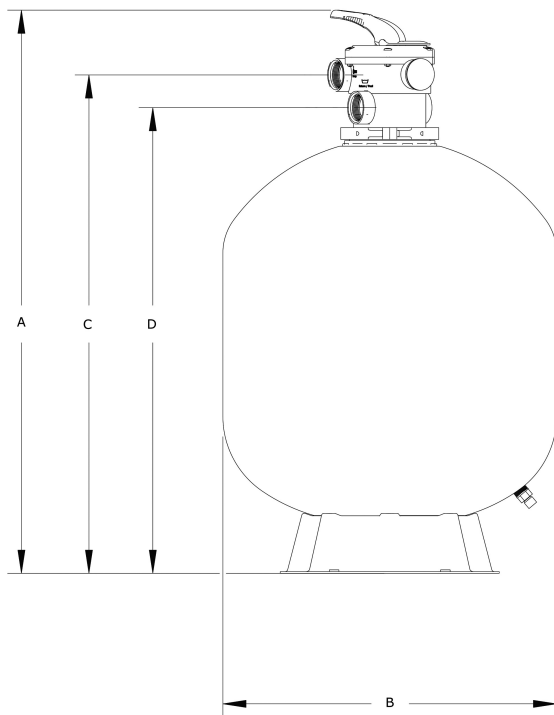

PRODUCT INFORMATION

One-piece, fibreglass-reinforced tank with UV-resistant coating.

With top-mount 6-way valve.

Switch off the pump before each lever action.

Warranty period: Tank 10 years

Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>