

**Profec Ball valve PVC-U 63 mm  
glue socket 16bar 24-  
240VAC/VDC grey type Safe  
600 with Actuator J4C S20  
(7018923)**



# TECHNICAL SPECIFICATIONS

|                                          |                                |
|------------------------------------------|--------------------------------|
| Colour                                   | grey                           |
| Type                                     | Safe 600 with Actuator J4C S20 |
| Material                                 | PVC-U                          |
| Operation                                | actuator                       |
| Housing construction                     | 3-part                         |
| Switching time                           | 15 sec.                        |
| Material housing                         | PVC-U                          |
| Material seal                            | hytrel/EPDM                    |
| Connection                               | glue socket                    |
| Voltage                                  | 24-240VAC/VDC                  |
| Max. temperature                         | 60 °C                          |
| Maximum ambient temperature -10 - +60 °C |                                |
| Pressure                                 | 16 bar                         |
| Size                                     | 63 mm                          |

## DIMENSIONS


|    |        |
|----|--------|
| Lb | 190 mm |
|----|--------|

ØDi-1 63 mm

ØDi-2 63 mm

Ct-1 266.5 mm

ØDf 50 mm

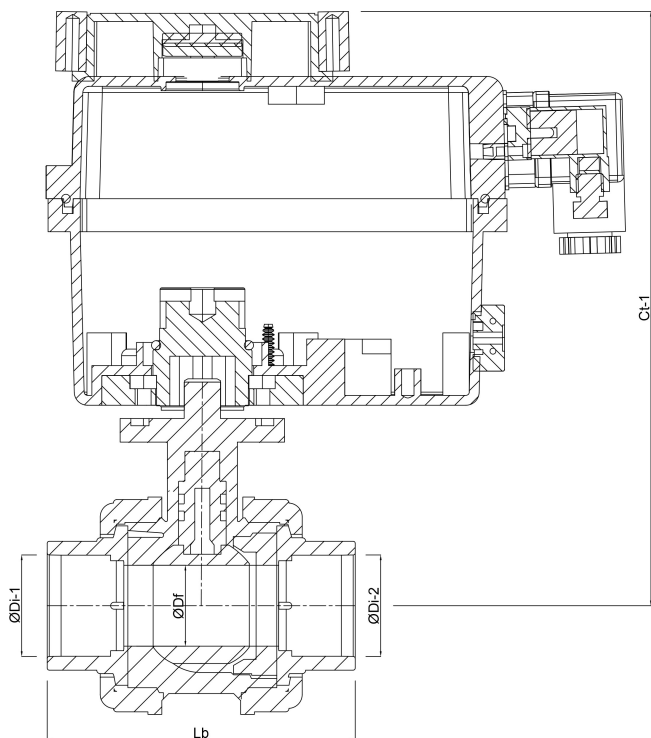

## PRODUCT INFORMATION

Connection according to DIN 43650

**Last modified date: 06/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road

Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>