

Submersible borehole pump 1" female thread 4,2A 230VAC type 3 TI 20 with capacitor - oil cooling (7031112)



TECHNICAL SPECIFICATIONS

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl
---------------------	-------

Connection	female thread
------------	---------------

Type	with capacitor - oil cooling
------	------------------------------

Voltage	230VAC
---------	--------

Max. temperature	35 °C
------------------	-------

Outer ø	74 mm
---------	-------

Max flow rate	2.7 m ³ /h
---------------	-----------------------

Press	1 "
-------	-----

Maximum ambient temperature 35 °C

IP value	IP68
----------	------

Type	3 TI 20
------	---------

Output Power	0,75 HP
--------------	---------

MWC	82 m
-----	------

Size	1"
------	----



Weight	12 kg
--------	-------

Power	0.55 kW
-------	---------

Impellers	20
Height	1210 mm
Ampere	4,2 A
BEP Capacity	2.1
BEP Head	47
PORlh	66
PORhh	31
PORlq	1.47
PORhq	2.52

DIMENSIONS

Db	74 mm
H-1	1210 mm
ØDi-1	1 "

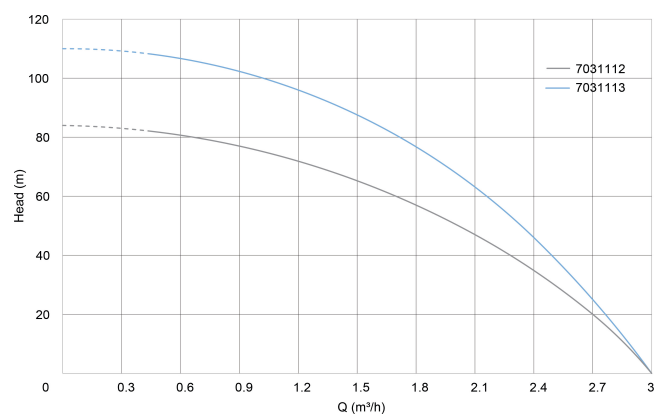

PRODUCT INFORMATION

Submersible borehole pump kit with built-in capacitor.

Increased resistance to sand.

Maximum amount of sand: 300 g/m³.

Installation: Fixed in vertical position.

20 mtr cable, DIN plug without control box

Last modified date: 08/05/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>