

# NaanDan Micro sprinkler plastic 3/8WW male thread 1,1 mm 360° red type Hadar 7110, inverted (0610021)



**NaanDan**  
by Rivulis

# TECHNICAL SPECIFICATIONS

|      |                      |
|------|----------------------|
| Type | Hadar 7110, inverted |
|------|----------------------|

|          |         |
|----------|---------|
| Material | plastic |
|----------|---------|

|            |             |
|------------|-------------|
| Connection | male thread |
|------------|-------------|

|                   |      |
|-------------------|------|
| Sector adj. range | 360° |
|-------------------|------|

|             |               |
|-------------|---------------|
| Rec. press. | 1.5 - 3.0 bar |
|-------------|---------------|

|        |     |
|--------|-----|
| Colour | red |
|--------|-----|

|                |        |
|----------------|--------|
| Capacity 2 bar | 61 l/h |
|----------------|--------|

|               |        |
|---------------|--------|
| Capacity 1bar | 43 l/h |
|---------------|--------|

|                 |        |
|-----------------|--------|
| Capacity 1,5bar | 53 l/h |
|-----------------|--------|

|                 |        |
|-----------------|--------|
| Capacity 2,5bar | 67 l/h |
|-----------------|--------|


|               |        |
|---------------|--------|
| Capacity 3bar | 73 l/h |
|---------------|--------|

|      |       |
|------|-------|
| Size | 3/8WW |
|------|-------|

|             |        |
|-------------|--------|
| Nozzle size | 1,1 mm |
|-------------|--------|

|             |        |
|-------------|--------|
| Radius 2bar | 4,25 m |
|-------------|--------|

| 0610021 |     |     | 0610022 |     |      | 0610023 |     |      | 0610024 |     |      | 0610025 |     |      | 0610026 |     |      |
|---------|-----|-----|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|---------|-----|------|
| 1.1mm   |     |     | 1.3mm   |     |      | 1.6mm   |     |      | 1.6mm   |     |      | 1.8mm   |     |      | 2.0mm   |     |      |
| Bar     | l/h | Ø   | Bar     | l/h | Ø    | Bar     | l/h | Ø    | Bar     | l/h | Ø    | Bar     | l/h | Ø    | Bar     | l/h | Ø    |
| 1.0     | 43  | 7.8 | 1.0     | 60  | 8.5  | 1.0     | 70  | 8.8  | 1.0     | 88  | 9.5  | 1.0     | 116 | 9.5  | 1.0     | 138 | 9.6  |
| 1.5     | 53  | 8.0 | 1.5     | 74  | 9.0  | 1.5     | 89  | 9.4  | 1.5     | 110 | 10.0 | 1.5     | 140 | 10.0 | 1.5     | 171 | 10.5 |
| 2.0     | 61  | 8.5 | 2.0     | 87  | 9.4  | 2.0     | 103 | 9.8  | 2.0     | 128 | 10.0 | 2.0     | 160 | 10.0 | 2.0     | 199 | 11.0 |
| 2.5     | 67  | 9.0 | 2.5     | 97  | 9.8  | 2.5     | 115 | 10.2 | 2.5     | 144 | 10.7 | 2.5     | 184 | 10.7 | 2.5     | 234 | 11.2 |
| 3.0     | 73  | 9.4 | 3.0     | 107 | 10.0 | 3.0     | 124 | 10.2 | 3.0     | 159 | 11.0 | 3.0     | 197 | 11.0 | 3.0     | 248 | 11.3 |

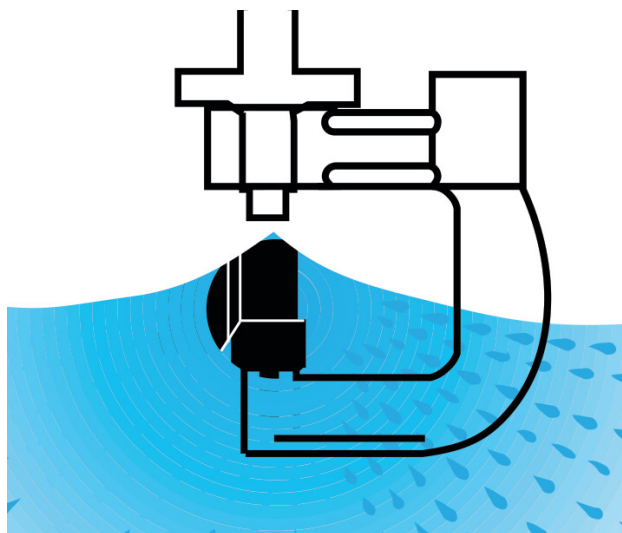

## PRODUCT INFORMATION

Complete with bayonet base. Mounted "upside down" on overhead spraylines to reduce wetting and dripping from spraylines. Use with 0620228 drainage preventor.

**Last modified date: 05/09/2026**

Bosta UK Ltd.  
 Reflection House  
 Olding Road  
 Bury St. Edmunds  
 Suffolk  
 IP33 3TA  
 T +44 (0) 1284 716580  
 E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>