


**Profec Ball valve ductile cast  
iron GGG40 varnished DN80  
DIN flange 16bar blue PN10/16  
(0401603)**

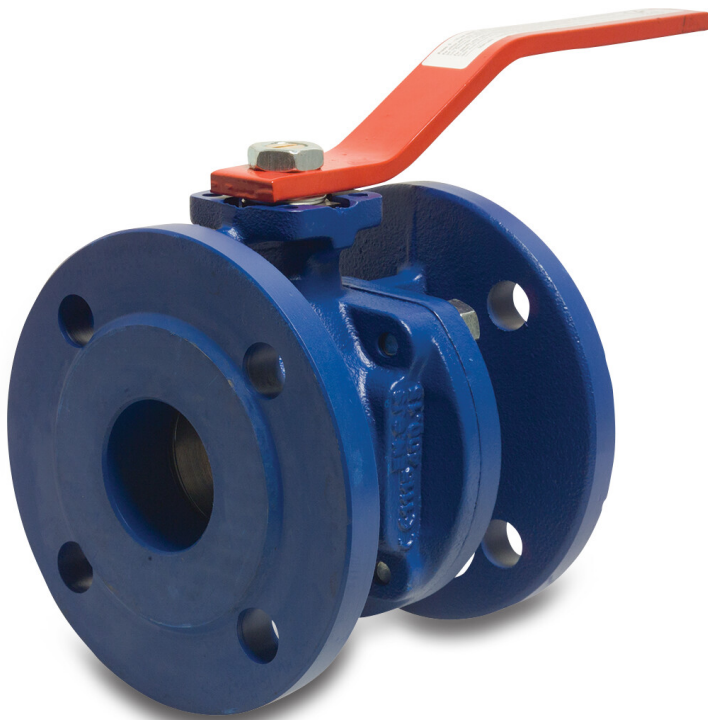

# TECHNICAL SPECIFICATIONS

|                      |                         |
|----------------------|-------------------------|
| Colour               | blue                    |
| Material             | ductile cast iron GGG40 |
| Surface treatment    | varnished               |
| Operation            | lever                   |
| Colour lever         | red                     |
| Handle material      | steel                   |
| Housing construction | 2-part                  |
| Material housing     | cast iron GG 25         |
| Material seal        | PTFE                    |
| Connection           | DIN flange              |
| Temperature range    | -10°C - 100°C           |
| Pressure             | 16 bar                  |
| Size                 | DN80                    |
| Flange               | PN10/16                 |
| PCD                  | 160 mm                  |
| Bolt hole            | 18 mm                   |
| Holes                | 8                       |

# DIMENSIONS


|               |     |
|---------------|-----|
| Handle height | 130 |
|---------------|-----|

|   |        |
|---|--------|
| L | 180 mm |
|---|--------|

|     |        |
|-----|--------|
| PCD | 160 mm |
|-----|--------|

|      |        |
|------|--------|
| Ct-1 | 165 mm |
|------|--------|

|   |        |
|---|--------|
| R | 280 mm |
|---|--------|

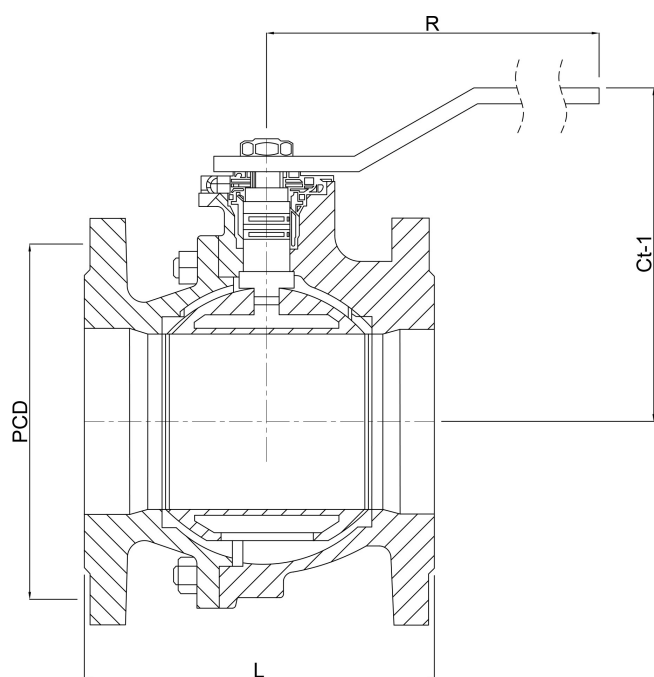

**Last modified date: 04/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds

Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>