

# **VIR Ball valve brass chrome plated 3" female thread 25bar WRAS/VA type 340B (0400978)**



# TECHNICAL SPECIFICATIONS

|      |      |
|------|------|
| Type | 340B |
|------|------|

|          |       |
|----------|-------|
| Material | brass |
|----------|-------|

|                   |               |
|-------------------|---------------|
| Surface treatment | chrome plated |
|-------------------|---------------|

|          |         |
|----------|---------|
| Approval | WRAS/VA |
|----------|---------|

|           |       |
|-----------|-------|
| Operation | lever |
|-----------|-------|

|              |      |
|--------------|------|
| Colour lever | blue |
|--------------|------|

|                 |                |
|-----------------|----------------|
| Handle material | dacromet steel |
|-----------------|----------------|

|                      |        |
|----------------------|--------|
| Housing construction | 2-part |
|----------------------|--------|

|               |                          |
|---------------|--------------------------|
| Ball material | hard chrome plated brass |
|---------------|--------------------------|

|                  |       |
|------------------|-------|
| Material housing | brass |
|------------------|-------|

|               |      |
|---------------|------|
| Material seal | PTFE |
|---------------|------|

|            |               |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

|                  |        |
|------------------|--------|
| Max. temperature | 150 °C |
|------------------|--------|

Minimum medium temperature 0 °C  
(continuous)

|      |      |
|------|------|
| Flow | full |
|------|------|

|                   |             |
|-------------------|-------------|
| Temperature range | 0°C - 150°C |
|-------------------|-------------|

|      |    |
|------|----|
| Size | 3" |
|------|----|

|          |        |
|----------|--------|
| Pressure | 25 bar |
|----------|--------|

## DIMENSIONS

|               |     |
|---------------|-----|
| Handle height | 132 |
|---------------|-----|

|    |        |
|----|--------|
| Lb | 163 mm |
|----|--------|

|       |     |
|-------|-----|
| ØDi-1 | 3 " |
|-------|-----|

|       |     |
|-------|-----|
| ØDi-2 | 3 " |
|-------|-----|


|     |       |
|-----|-------|
| F-1 | 27 mm |
|-----|-------|

|     |       |
|-----|-------|
| F-2 | 27 mm |
|-----|-------|

|      |        |
|------|--------|
| Ct-1 | 132 mm |
|------|--------|

|   |        |
|---|--------|
| R | 281 mm |
|---|--------|

|     |       |
|-----|-------|
| ØDf | 80 mm |
|-----|-------|

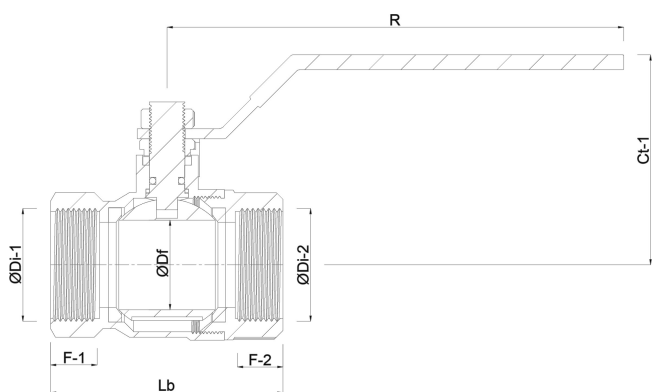

**Last modified date: 04/11/2025**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>