

DAB Jet pump stainless steel 304 1" female thread 8bar 5,1A 230VAC green self-priming with press control type JETINOX 82 Control D (7030930)



TECHNICAL SPECIFICATIONS

Colour	green
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	technopolymer A
Model	self-priming with press control
Connection	female thread
Voltage	230VAC
Max. temperature	35 °C
Minimum medium temperature 0 °C (continuous)	
Press	1 "
Maximum ambient temperature 40 °C	
Suction	1 "
Type	JETINOX 82 Control D
Size	1"
Power	0.6 kW
MWC	47

Ampere	5,1 A
Max flow rate	3.6 m ³ /h
BEP Capacity	2.4
BEP Head	26.3
PORlh	30.9
PORhh	23.7
PORlq	1.7
PORhq	2.9

DIMENSIONS

L	406 mm
H	197 mm
LM	390 mm
MW	165 mm
Cb-1	270 mm
Ct-1	239 mm
Cr-1	167 mm
L	406 mm
W-1	174 mm

ØDi-1 1 "

ØDi-2 1 "

O 9 mm



Cb-1 144 mm

G-1 111 mm

Cl-1 122 mm

Mr 207 mm

H 197 mm

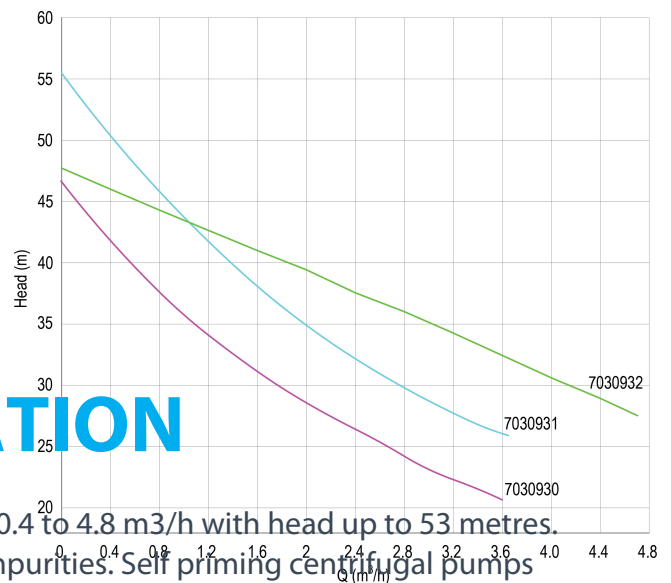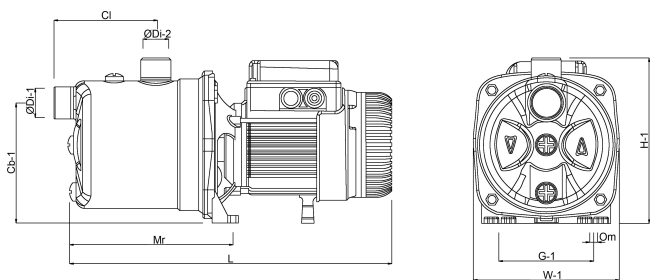

PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road

Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>