

**DAB Submersible borehole
pump stainless steel 304 1"
female thread 3,3A 230VAC
with 1m cable type Micra 50M
oil cooling (7030954)**



TECHNICAL SPECIFICATIONS

Material	stainless steel 304
----------	---------------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	noryl GFN2
---------------------	------------

Connection	female thread
------------	---------------

Type	oil cooling
------	-------------

Max. temperature	35 °C
------------------	-------

Outer ø	74 mm
---------	-------

Minimum medium temperature 0 °C
(continuous)

Max flow rate	2.7 m ³ /h
---------------	-----------------------

Press	1 "
-------	-----

Maximum ambient temperature -5 °C

BEP Capacity	1.8
--------------	-----

Minimum ambient temperature 40 °C

IP value	IP68, class F
----------	---------------

Type	Micra 50M
------	-----------




Output Power	0,5 HP
--------------	--------

Model	with 1m cable
Max. head	45 m
Size	1"
Voltage	230VAC
Weight	9 kg
Power	0.37 kW
Impellers	15
Ampere	3,3 A
BEP Head	26.9
PORlh	34.3
PORhh	18.8
PORlq	1.3
PORhq	2.2

DIMENSIONS

Db	74 mm
L	930 mm
L	930 mm
ØDi-1	1 "

ØDi-1

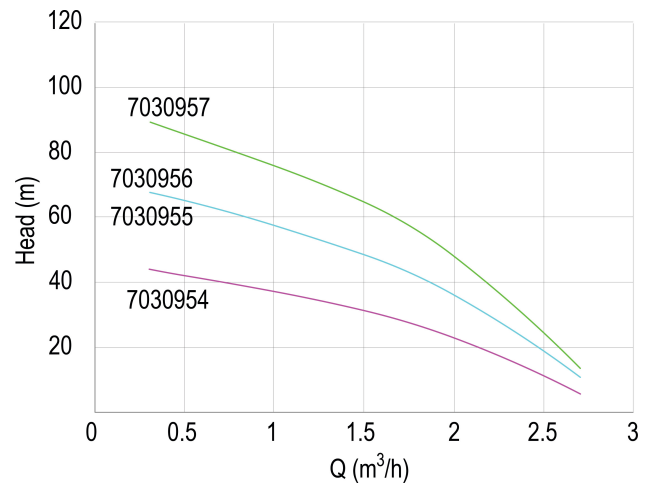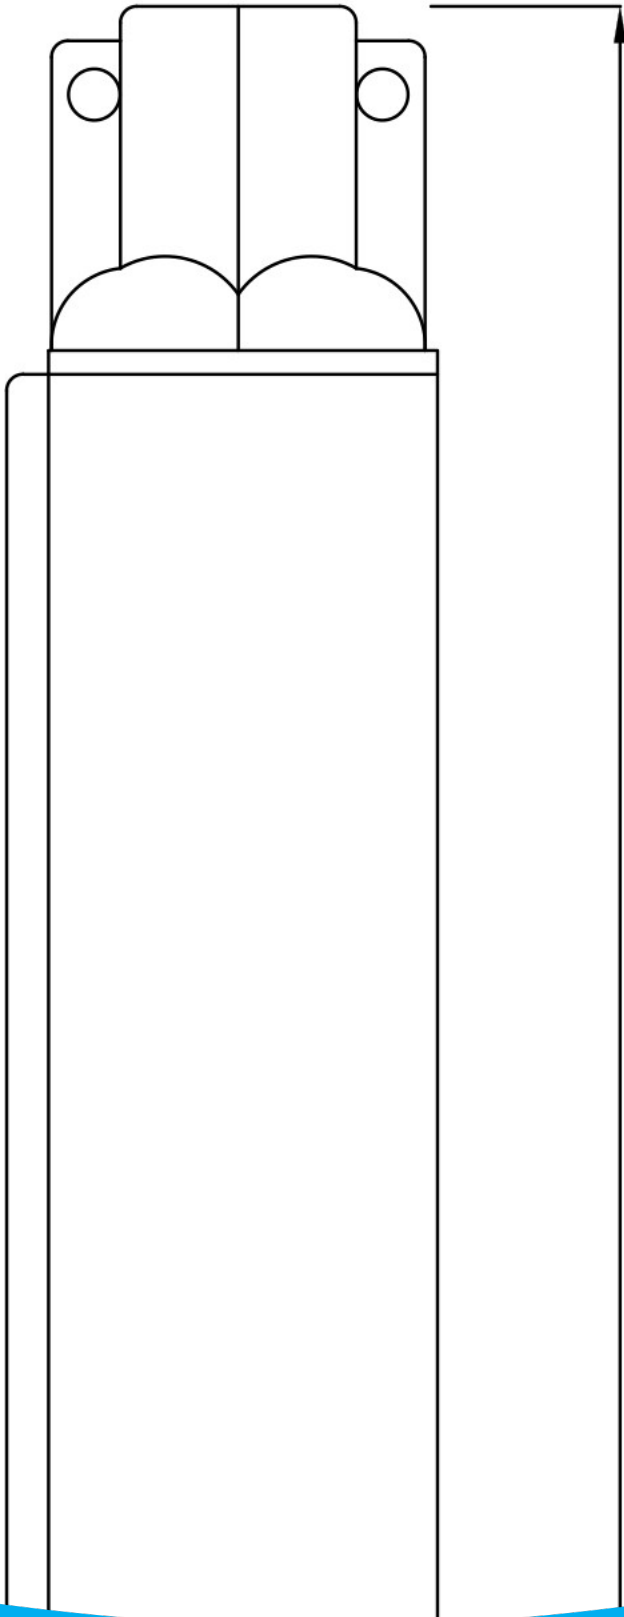

bosta
bringing water to life

PRODUCT INFORMATION

Pumped liquid: clean, free of solids and abrasives, non-viscous, non-aggressive, and chemically neutral, with properties similar to water.

Maximum permitted amount of sand: 40 g/m³.

Installation: in 3" wells or larger, tanks and cisterns, vertical position. In case of horizontal installation, ensure a minimum load on the thrust assembly.

Last modified date: 05/09/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>