


**Hunter Solenoid valve
fibreglass reinforced nylon 1
1/2" female thread 10bar
24VAC black type PGV-151-B
with flow control (7026330)**

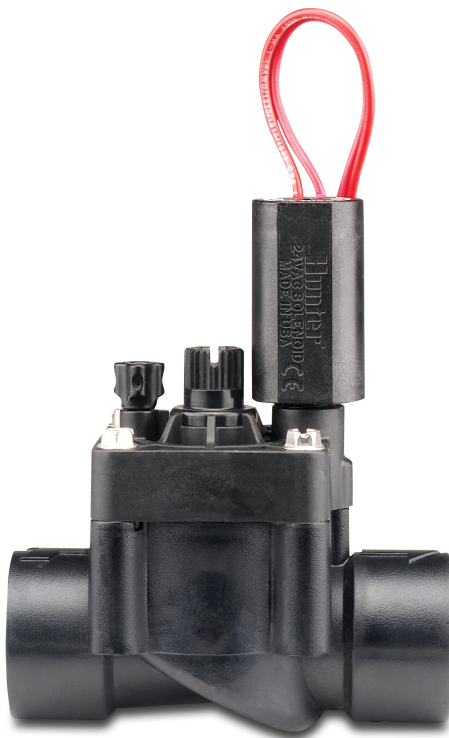

Hunter®

TECHNICAL SPECIFICATIONS

Colour	black
Material	fibreglass reinforced nylon
Operation	indirect solenoid-operated with flow control handle
Material housing	fibreglass reinforced nylon
Voltage	24VAC
Minimum inlet pressure	1.5 bar
Pressure	10 bar
Max. temp.	66 °C
Type	PGV-151-B
Capacity	75 - 570 l/min
Size	1 1/2"
Connection	female thread
Type	with flow control

PRODUCT INFORMATION

Recommended for residential and light commercial sites.
External/internal manual bleed allows for quick and easy activation at the valve.
Flow control maximises efficiency and prolongs the life of the system.

Last modified date: 08/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>