

**DAB Submersible borehole
pump stainless steel 304 1 1/4"
female thread 4,5A 230VAC
with 15m cable and control box
booster type S4 KIT 2/10 oil
cooling (7030912)**



TECHNICAL SPECIFICATIONS

Material	stainless steel 304
----------	---------------------

Pump body	stainless steel 304
-----------	---------------------

Material impeller 1	technopolymer
---------------------	---------------

Connection	female thread
------------	---------------

Type	oil cooling
------	-------------

Voltage	230VAC
---------	--------

Max. temperature	40 °C
------------------	-------

Outer ø	99 mm
---------	-------

Minimum medium temperature 0 °C (continuous)	
---	--

Maximum ambient temperature -10 °C	
------------------------------------	--

Minimum ambient temperature 40 °C	
-----------------------------------	--

IP value	IP68, class F
----------	---------------

Type	S4 KIT 2/10
------	-------------

Output Power	0,75 HP
--------------	---------

Model	with 15m cable and control box booster
-------	--

Max. head	67 m
-----------	------

Size	1 1/4"
Weight	10.9 kg
Power	0.55 kW
Impellers	10
Ampere	4,5 A
Max flow rate	3 m ³ /h
Press	1 "
BEP Capacity	2.15
BEP Head	46.1
PORlh	56.3
PORhh	37
PORlq	1.5
PORhq	2.6
Efficiency	57,2 %
Packaging dimensions L/W/H	120 x 120 x 826 mm

DIMENSIONS

Db	99 mm
H-1	726 mm




ØDi-1

1 1/4 "



bosta
bringing water to life

ØDi-1

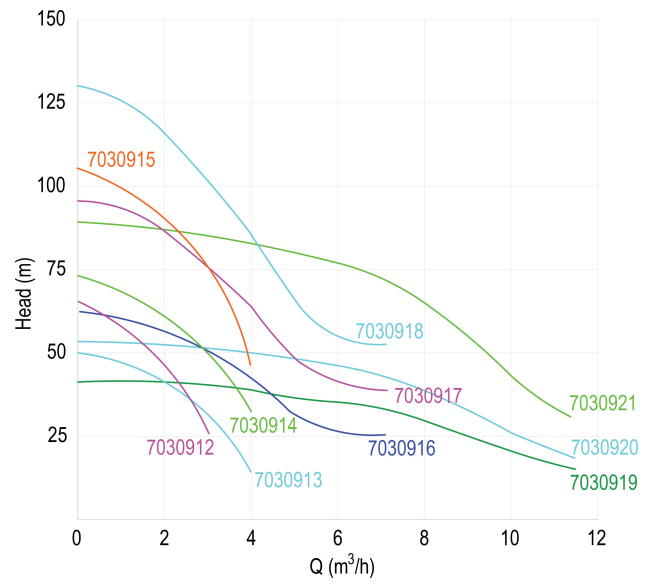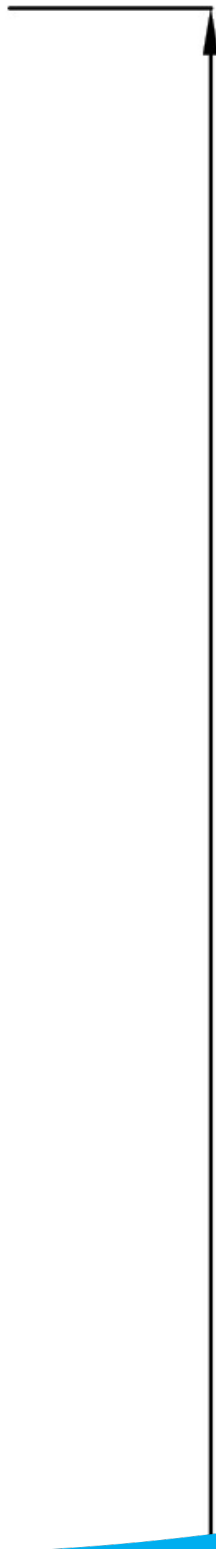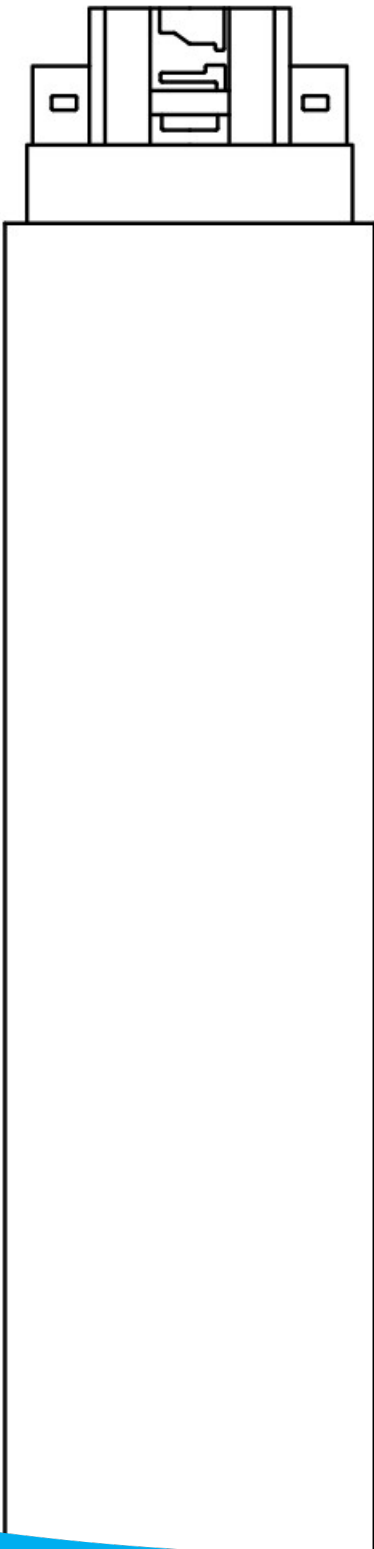

bosta
bringing water to life

PRODUCT INFORMATION

Submersible borehole pump kit with pump body and motor, power supply cable, cord and control box.

Pump maximum diameter: 99 mm

Maximum amount of sand: 150 g/m³

Installation: Fixed in vertical position or horizontal installation with a cooling sleeve.

Motor: 4OL oil-filled two-pole asynchronous DAB motor

Last modified date: 05/09/2026

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E enquiries@bosta.co.uk

<http://www.bosta.com>