

Grundfos Multi-stage centrifugal pump stainless steel DN35 DIN flange 2,5A 400VAC type CRI 1S-27 A FGJ I V HQQV (7039625)



GRUNDFOS® 

TECHNICAL SPECIFICATIONS

Material	stainless steel
----------	-----------------

Shaft	stainless steel 316
-------	---------------------

Pump body	stainless steel 316
-----------	---------------------

Material impeller 1	stainless steel 304
---------------------	---------------------

Connection	DIN flange
------------	------------

Voltage	400VAC
---------	--------

Temperature range	-20°C - 90°C
-------------------	--------------

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type	CRI 1S-27 A FGJ I V HQQV
------	--------------------------

Output Power	1.5 HP
--------------	--------

Max. head	160 m
-----------	-------

Size	DN35
------	------

Power	1.1 kW
-------	--------

Impellers	27
-----------	----

Ampere	2,5 A
--------	-------

Max flow rate	1.1 m ³ /h
---------------	-----------------------

Efficiency	82,7 %
------------	--------

Press	35
-------	----

Motor RPM	2770
-----------	------

DIMENSIONS

Cb-1	75 mm
------	-------

Cb-2	75 mm
------	-------



H-1	971 mm
-----	--------

L	250 mm
---	--------

W-1	210 mm
-----	--------

ØDi-1	35 mm
-------	-------

ØDi-2	35 mm
-------	-------

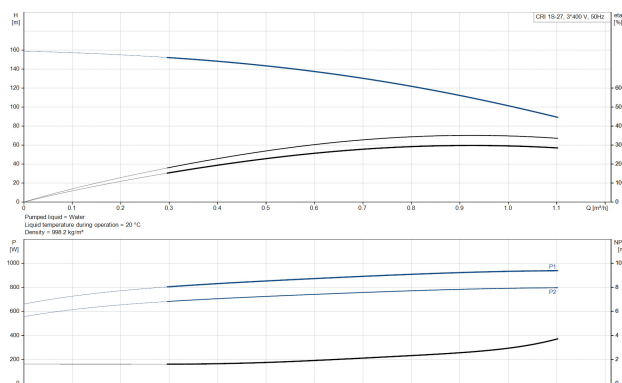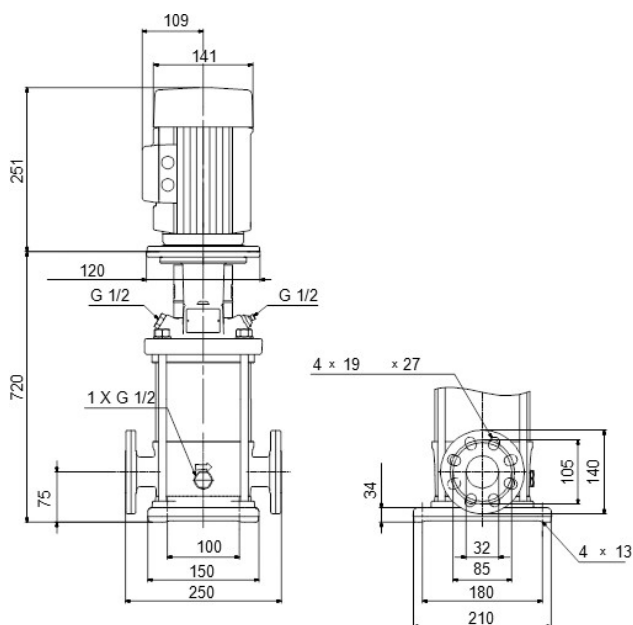

PRODUCT INFORMATION

Grundfos CRI pumps are vertical, non-self-priming, multistage, in-line, centrifugal pumps for installation in pipe systems and mounting on a foundation, suitable for industrial applications. This design provides a more compact pump design and pipework. CR pumps are designed for a variety of applications ranging from the pumping of potable water to the pumping of chemicals. The pumps are therefore suitable for a wide range of pumping systems where the performance and material of the pump meet specific demands.

Last modified date: 05/09/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>