

Pentair Pool filter set PE 50 mm glue socket 2bar 5,5A 230VAC black type FS-22A6-FF19R (7017531)



TECHNICAL SPECIFICATIONS



Colour	black
Material	PE
Connection	glue socket
Voltage	230VAC
Frequency	50 Hz
Pressure	2 bar
IP value	IP44
Max. temp.	35 °C
Type	FS-22A6-FF19R
Size	50 mm
Diameter	560 mm
Weight	24 kg
Sand	120 kg
Ampere	5,5 A
Max flow rate	12 m ³ /h
Pump	FreeFlo FF19R
Max. pool vol.	60 m ³

DIMENSIONS

B 22 " inch

A 800 mm

B 1090 mm

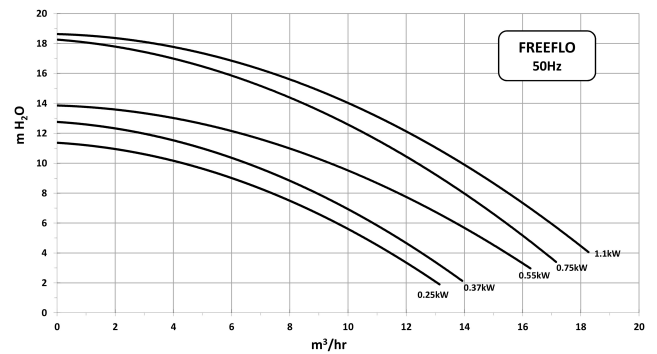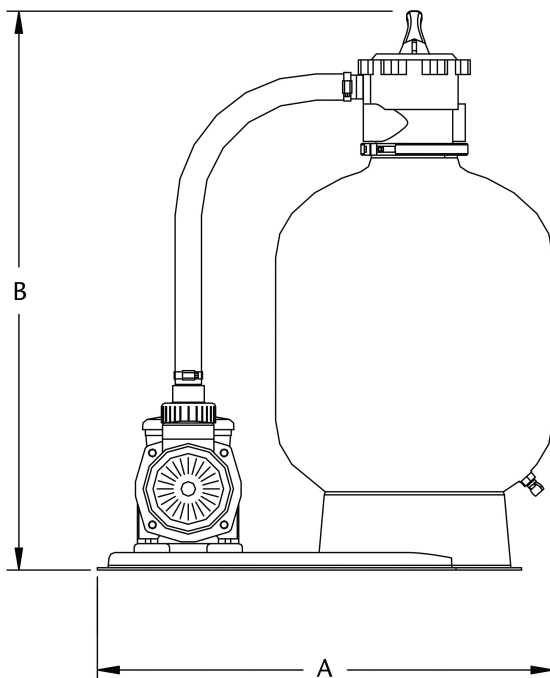

PRODUCT INFORMATION

Strong and durable thermoplastic tank with 6-way valve and FreeFlo centrifugal pump. The pump has a large pre-filter for a longer service interval. Complete set mounted on a solid base.

Last modified date: 06/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>