

# DAB Submersible pump fibre-reinforced plastic 1" female thread 1,9A 230VAC green type Feka 300 M-NA (7038436)



# TECHNICAL SPECIFICATIONS

|        |       |
|--------|-------|
| Colour | green |
|--------|-------|

|          |                          |
|----------|--------------------------|
| Material | fibre-reinforced plastic |
|----------|--------------------------|

|           |         |
|-----------|---------|
| Pump body | plastic |
|-----------|---------|

|                     |                          |
|---------------------|--------------------------|
| Material impeller 1 | fibre-reinforced plastic |
|---------------------|--------------------------|

|            |               |
|------------|---------------|
| Connection | female thread |
|------------|---------------|

|         |        |
|---------|--------|
| Voltage | 230VAC |
|---------|--------|

|                  |        |
|------------------|--------|
| Max. temperature | 35° °C |
|------------------|--------|

Minimum medium temperature 0 °C  
(continuous)

|       |     |
|-------|-----|
| Press | 1 " |
|-------|-----|

|      |               |
|------|---------------|
| Type | Feka 300 M-NA |
|------|---------------|

|              |        |
|--------------|--------|
| Output Power | 0,3 HP |
|--------------|--------|

|           |       |
|-----------|-------|
| Max. head | 6,4 m |
|-----------|-------|

|      |    |
|------|----|
| Size | 1" |
|------|----|

|       |              |
|-------|--------------|
| Float | not included |
|-------|--------------|

|       |         |
|-------|---------|
| Power | 0.22 kW |
|-------|---------|

|        |       |
|--------|-------|
| Ampere | 1,9 A |
|--------|-------|

Max flow rate

12 m<sup>3</sup>/h

## DIMENSIONS

Db

180 mm

H-1



71 mm

H-2

329 mm

ØDi-1

1 1/4 "

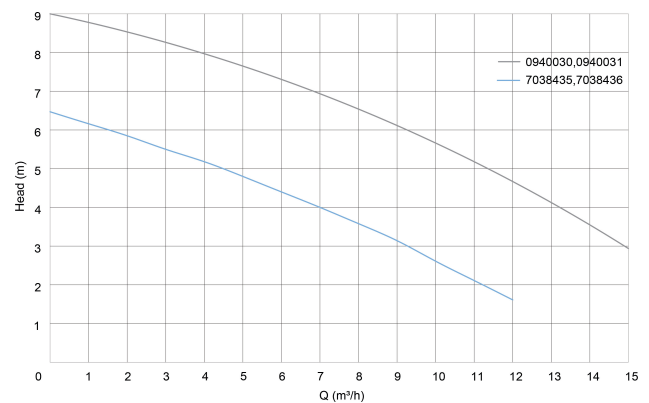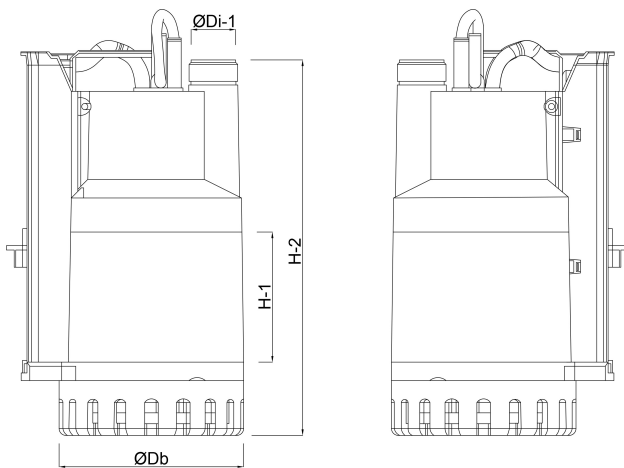

## PRODUCT INFORMATION

For solids up to 25mm.

Technical features:

Pump body, protection cover, filter and fan in noryl fibreglass.

Motor axis and motor body in S/S steel.

Seal with 3 seal rings in oil chamber.

Automatic float switch.

With built in thermal safety.

With approximately 10 metres cable.

**Last modified date: 05/09/2026**

Bosta UK Ltd.  
Reflection House  
Olding Road  
Bury St. Edmunds  
Suffolk  
IP33 3TA  
T +44 (0) 1284 716580  
E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)  
<http://www.bosta.com>