

**Foras Jet pump cast iron 1 1/2"
x 1 1/4" female thread 8bar
9,8A 230VAC blue self priming
type JAM 200 (7034805)**



TECHNICAL SPECIFICATIONS

Colour blue

Material cast iron

Pump body cast iron

Material impeller 1 noryl

Model self priming

Connection female thread

Seal type B

Max. temperature 50 °C

Max flow rate 72 m³/h

Press 1 1/4 "

Suction 1 1/2 "

Type JAM 200

Max. head 58,1 m

Size 1 1/2" x 1 1/4"

Voltage 230VAC

Minimum medium temperature 0 °C
(continuous)

Power 2.2 kW

Ampere 9,8 A

Maximum ambient temperature 40 °C

BEP Capacity 6

BEP Head 36

PORlh 42

PORhh 58

PORlq 4.2

PORhq 7.2

Minimum ambient temperature 0 °C

DIMENSIONS

Cb-1 175 mm

Cb-1 175 mm

Cb-2 231.5 mm

Cl-1 167 mm

Cr-1 167 mm

Ct-1 56.5 mm

G-1 165 mm

H 231.5 mm

H-1 231.5 mm

L 506 mm

L 506 mm

LM 236.4 mm

Mr 269.6 mm

MW 165 mm



O 9 mm

W 203 mm

W-1 203 mm

ØDi-1 1 1/2 "

ØDi-2 1 1/4 "

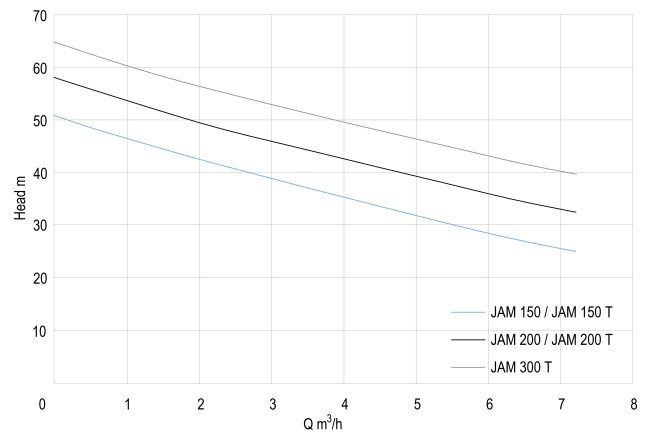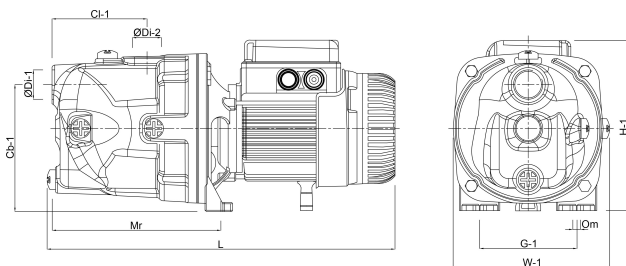

PRODUCT INFORMATION

Uses: Self-priming centrifugal pump for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks, for transferring liquids and emptying tanks; also used for gardening. Construction features: Cast iron pump casing with threaded inlet and outlet; cast iron motor bracket; impeller in Noryl or in brass; ceramic - graphite mechanical seal; motor shaft in AISI 416 steel; world leading brand ball bearings; liquid temperature range 0 - 50 °C; max. operating pressure 8 bar. MOTOR2 pole electric induction motor for continuous operations; stator made with low-loss laminated electric sheet steel; insulation Class F; IP 44 protection level; thermal protection for single-phase models; the user is responsible for supplying protection for the three-phase models.

Last modified date: 12/06/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>