

DAB Jet pump stainless steel 304 1" female thread 8bar 6,2A 230VAC green self-priming with press control type JETINOX 112 Control D (7030931)



TECHNICAL SPECIFICATIONS

Colour	green
Material	stainless steel 304
Pump body	stainless steel 304
Material impeller 1	technopolymer A
Model	self-priming with press control
Connection	female thread
Voltage	230VAC
Max. temperature	35 °C
Minimum medium temperature 0 °C (continuous)	
Press	1 "
Maximum ambient temperature 40 °C	
Suction	1 "
Type	JETINOX 112 Control D
Max. head	53,8 m
Size	1"
Power	0.75 kW

Ampere	6,2 A
Max flow rate	3.6 m ³ /h
BEP Capacity	2.4
BEP Head	39.2
PORlh	45.1
PORhh	35.1
PORlq	1.7
PORhq	2.9

DIMENSIONS

Cb-1	102.5 mm
Cb-1	144 mm
Cl-1	122 mm
Cr-1	89 mm
Ct-1	102.5 mm
G-1	111 mm
H	197 mm
H	197 mm
L	424 mm

L 440 mm

LM 409 mm




Mr 207 mm

O 9 mm

W-1 174 mm

ØDi-1 1 "

ØDi-2 1 "

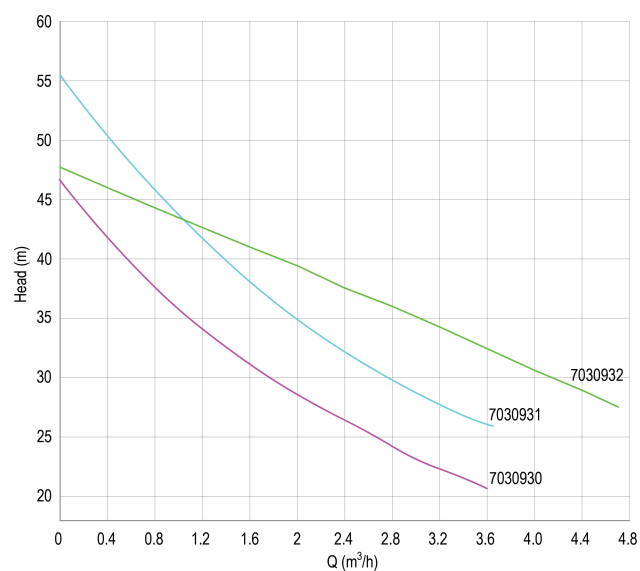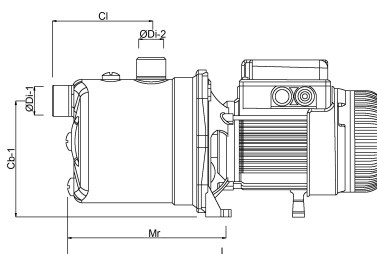

PRODUCT INFORMATION

Installation: Horizontal, Fixed. Operating range: from 0.4 to 4.8 m³/h with head up to 53 metres. Suitable for pumping water with low levels of sand impurities. Self priming centrifugal pumps with excellent suction capacity even when air bubbles are present.

Last modified date: 05/09/2026

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580
E enquiries@bosta.co.uk
<http://www.bosta.com>