

# DAB Submersible pump reinforced plastic 1" male thread 3,5A 230VAC green type Nova UP 600 M-A with float switch (7030945)



# TECHNICAL SPECIFICATIONS

Colour green

Material reinforced plastic

Pump body technopolymer

Material impeller 1 technopolymer

Connection male thread

Voltage 230VAC

Max. temperature 35 °C

Minimum medium temperature 0 °C  
(continuous)

Press 1 "

Maximum ambient temperature 40 °C

Minimum ambient temperature 0 °C

Type Nova UP 600 M-A

Output Power 0,7 HP

Size 1"



Float included

Power 0.52 kW

|               |                        |
|---------------|------------------------|
| MWC           | 9,8                    |
| Ampere        | 3,5 A                  |
| Max flow rate | 13.5 m <sup>3</sup> /h |
| BEP Capacity  | 10.8                   |
| BEP Head      | 5.74                   |
| PORlh         | 7.17                   |
| PORhh         | 4.47                   |
| PORlq         | 7.56                   |
| PORhq         | 12.96                  |

## DIMENSIONS

|       |          |
|-------|----------|
| Db    | 160 mm   |
| H-1   | 111.6 mm |
| H-2   | 332 mm   |
| ØDi-1 | 1 "      |

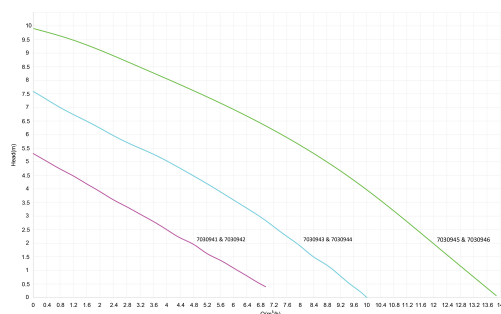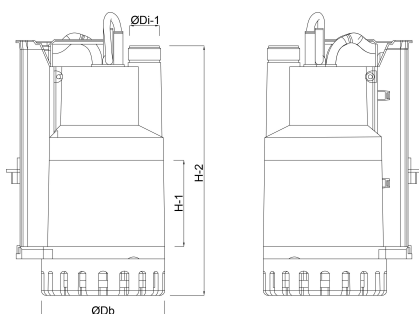

**bosta**  
bringing water to life

# PRODUCT INFORMATION

Installation: vertical, fixed or portable. Max. immersion depth: 7 metres.

Pump can be used with liquids containing solid particles of up to 10 mm in size.

Suited for narrow well installation requiring automatic suction up to 2/3 mm. Filter is removable.

Dry operation of max. 1 minute.

**Last modified date: 26/02/2026**

Bosta UK Ltd.

Reflection House

Olding Road

Bury St. Edmunds

Suffolk

IP33 3TA

T +44 (0) 1284 716580

E [enquiries@bosta.co.uk](mailto:enquiries@bosta.co.uk)

<http://www.bosta.com>