

PENTAIR
TRITON® NEO
 CLEAR980 TECHNOLOGY

Filter	Class	Surf	Flow	Surf	Notes
	mm	mm	m³/h	ft	
☐ 48	487	6.73	8.5	28	SM ☒ TM ☐
☐ 56	568	8.26	13	43	
☐ 76	762	12.4	22	72	
☐ 100	1016	18.4	33	108	

MAX 2.5 BAR

www.pentairpoolseurope.com



TECHNISCHE SPECIFICATIES

Kleur	blauw
Materiaal	glasvezel versterkt polyester
Verbinding	binnendraad
Werkdruk	3,5 bar
Max. temp.	50 °C
Type	F-30S8-NEOCPPRO
Maat	2"
Diameter	762 mm
Gewicht	31.8 kg
Zand	275 kg
Filteropp.	0.45 m ²
Max capaciteit	22 m ³ /h
Max. vol. zwembad	110 m ³

AFMETINGEN


B	30 inch
E	271 mm

A 1055 mm

B 610 mm

C 1101 mm

D 498 mm

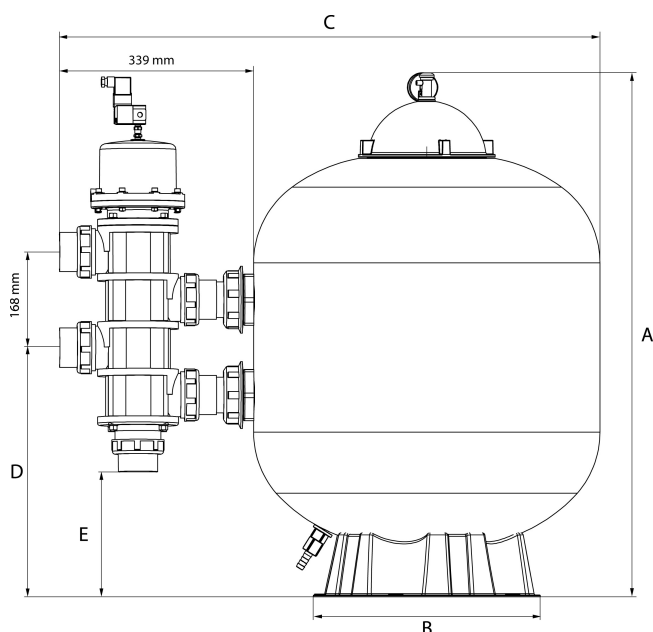

PRODUCTINFORMATIE

Glasvezel versterkte polyester tank uit één stuk vervaardigd met UV-bestendige coating zandfilter met Pro Valve. De Pentair Pro Valve stelt externe regelsystemen zoals IntelliPool™ in staat om automatische terugspoelingen van het filter uit te voeren. Garantietermijn: Tank 10 jaar

Gegenereerd op datum: 06-11-2025

<http://www.bosta.com>