

Foras Multi-stage centrifugal pump cast iron 1 1/4" female thread 5,1A 230/400VAC blue type P7SV - 350/7T (0920432)



TECHNICAL SPECIFICATIONS

Colour	blue
Material	cast iron
Shaft	stainless steel 304
Pump body	cast iron
Material impeller 1	noryl
Connection	female thread
Voltage	230/400VAC
Max. temperature	35 °C
Minimum medium temperature 5 °C (continuous)	
Press	1 1/4 "
Maximum ambient temperature 40 °C	
Suction	1 1/4 "
Type	P7SV - 350/7T
Output Power	3,5 HP
Material seal	graphit/silicon carbide
Size	1 1/4"

Seal	type M
Power	2.57 kW
Impellers	7
MWC	83,5
Ampere	5,1 A
Max flow rate	10.8 m ³ /h

DIMENSIONS



G-2	178.5 mm
L	229 mm
W-1	162 mm
Lb	228 mm
ØDi-1	1 1/4 "
ØDi-2	1 1/4 "
O	11 mm
Cb-1	40 mm
Cb-2	250 mm
G-1	125 mm
Cl-1	135 mm

W-2

204 mm

H

575 mm

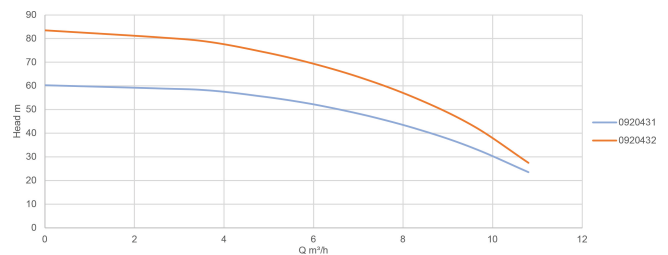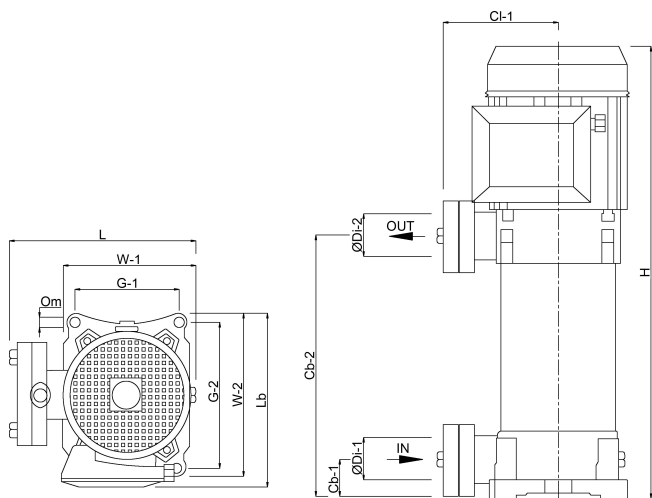

PRODUCT INFORMATION

Multistage vertical pumps. Pumping of clean non-loaded fluids in the domestic, agricultural and industrial sectors; pressurising systems; irrigation; drinking and glycol water; water treatment; food industry; heating and air conditioning; washing system.

Maximum liquid temperature: from - 15 to 90°C.

Ambient temperature: max 40°C.

Insulation class F; protection degree IP 44.

Supplied without cable.

Last modified date: 05/11/2025

Bosta UK Ltd.
Reflection House
Olding Road
Bury St. Edmunds
Suffolk
IP33 3TA
T +44 (0) 1284 716580

E enquiries@bosta.co.uk
<http://www.bosta.com>